

Billow

Ceiling Baffles

Premier Collection

Billow brings refreshing softness to today's hard-edged spaces with curved lines, natural texture, and high sound performance. Multiple sizes, colors, and mounting options give you maximum freedom to precisely create the environment you envision and design a signature pattern to float effortlessly above any space.

Specifications

Surface	Ceiling
Material	FilaSorb™ polyester felt
Weight	0.49 lb./ft ² (±10%)
Standard Sizes	Height: 4" up to 12" H (1" increments) Width: 14" W Depth: 2, 3" D Length: 48, 96" L



Billow Ceiling Baffles in White

Technical

NRC Rating	1.65*
Fire Test	ASTM E84, Class A CAN/ULC-S102 Flame spread index: 15 Smoke developed index: 200
Water Sorption	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
Colorfastness	ISO 105-B02, 6-7

* Test results available upon request.

Details

Lead Time	3 - 6 weeks
Origin	Manufactured and assembled in the US
Warranty	Product: 20 years* Colorfastness: 20 years*

* Conditions apply

Environmental

Recycled Content	Minimum 60%
Energy	Generated using 40% solar energy
Indoor Air Quality	VOC less than/equal to 0.5mg/m ³
Recyclable	100%*
Certifications	Environmental Product Declaration Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

* PET is recyclable through participating partners.



For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call **800.966.8557**.


Billow Ceiling Baffles | January 2026

Colorways

PREMIER



Order samples at acoufelt.com/colorways



 For questions or additional product information, visit acoufelt.com or call 800.966.8557.

Billow Ceiling Baffles | January 2026



Sizes

Standard Sizes Height: 4" up to 12" H (1" increments)
 Width: 14" W
 Depth: 2, 3" D
 Length: 48, 96" L


Elevation

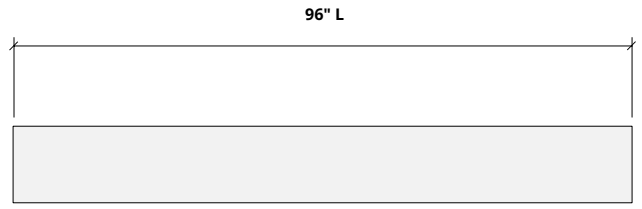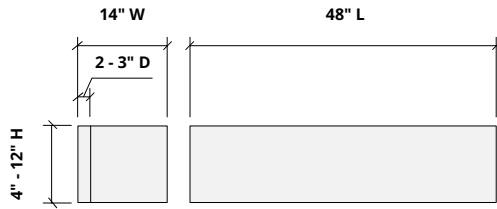


Plan

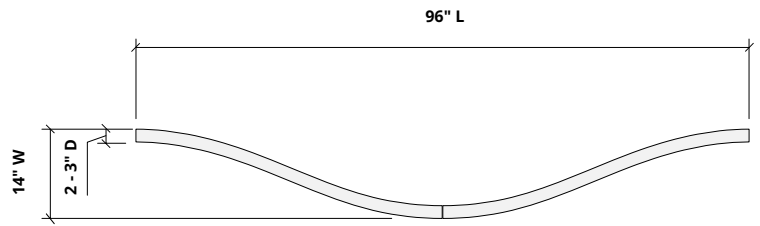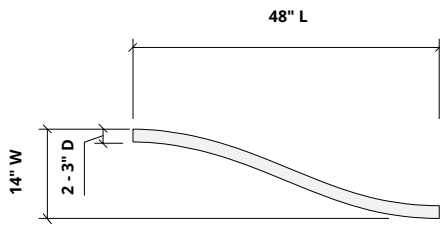

Perspective







Perspective

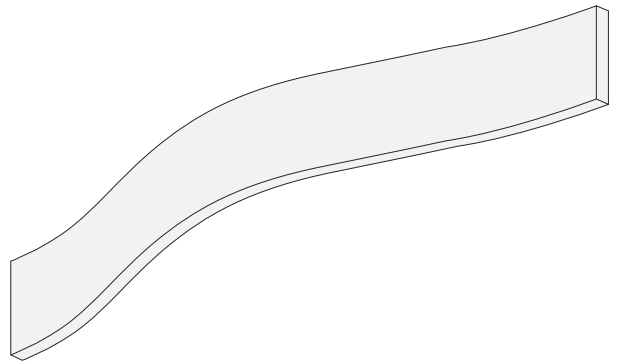

Hardware Spacing

48" L	18" on center spacing
96" L	34" on center spacing

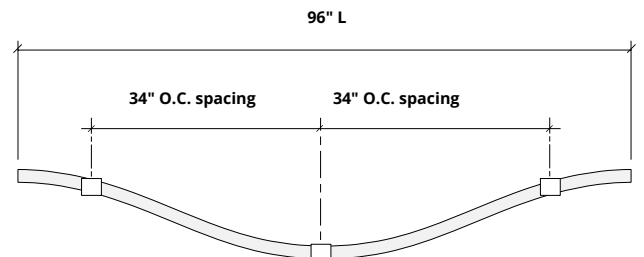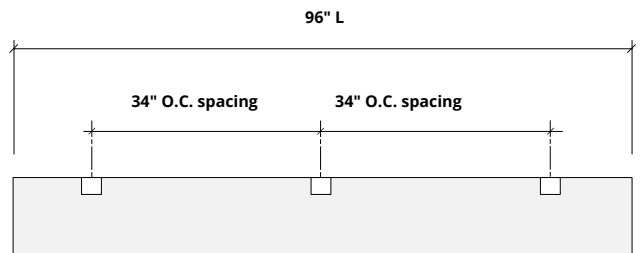

**The number of connection locations may vary depending on mounting methods.*


How to Specify

1. Choose Height

2. Choose Length

3. Choose Colorways

Select desired height.



1. Choose Height

2. Choose Length

3. Choose Colorways

Billow baffles come in the standard lengths of: 12, 18, 24, 30, 36, 42, 48, 54, 60, 66, 72, 78, 84, 90, 96, 102, 108, 110" L.
Custom sizes are available.

1. Choose Height


2. Choose Length

3. Choose Colorways

See colorway choices on page 3.


Mounting Methods

Cable to deck

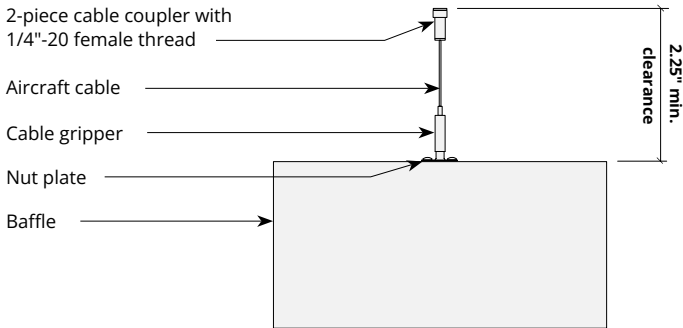


Hardware Kits:
 HK1006 - 48" Cable
 HK1010 - 120" Cable

Cable to T-grid

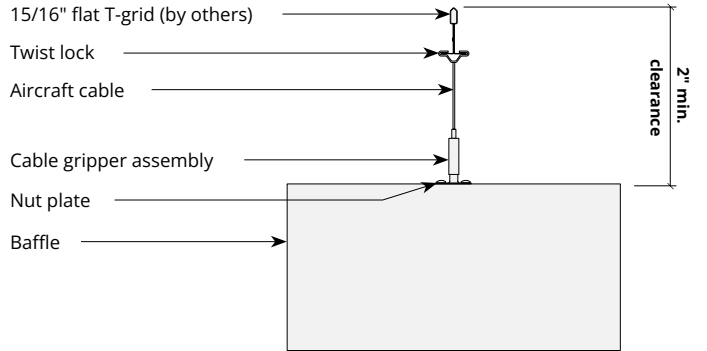


Hardware Kits:
 HK1008 - 48" Cable
 HK1012 - 120" Cable

Cable to strut channel

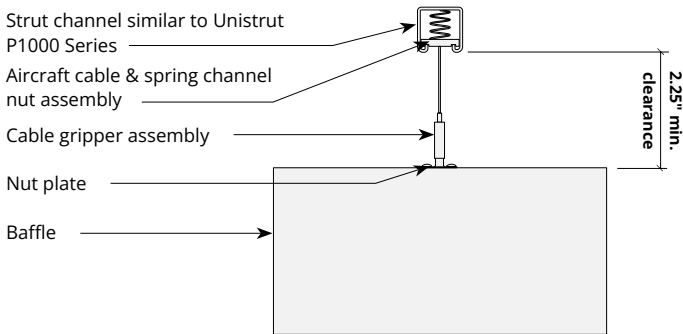


Hardware Kits:
 HK1009 - 48" Cable
 HK1013 - 120" Cable

Swivel cable to deck

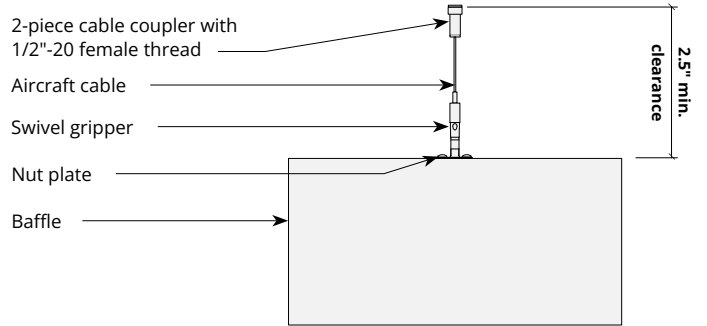

Hardware Kits:
 HK1007 - 48" Cable
 HK1011 - 120" Cable


Magnet

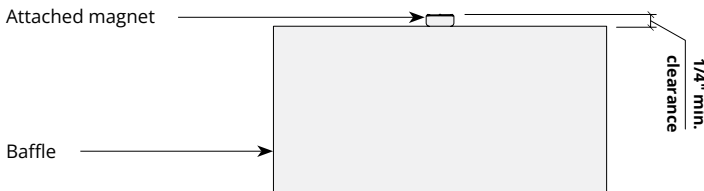

Hardware Kits:
 HK1279


Mounting Methods cont'd.

Threaded rod

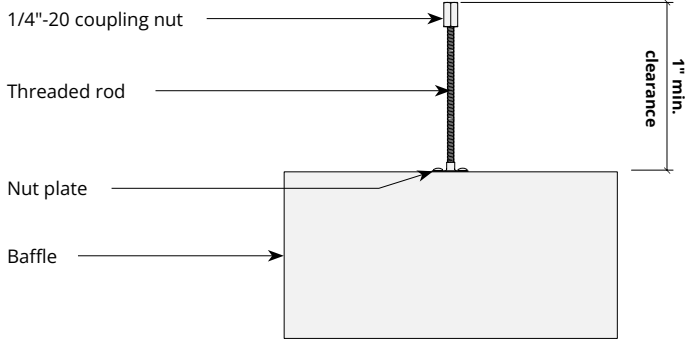


Hardware Kits:
HK1014 - 24" Cable
HK1015 - 48" Cable

Threaded rod to strut channel

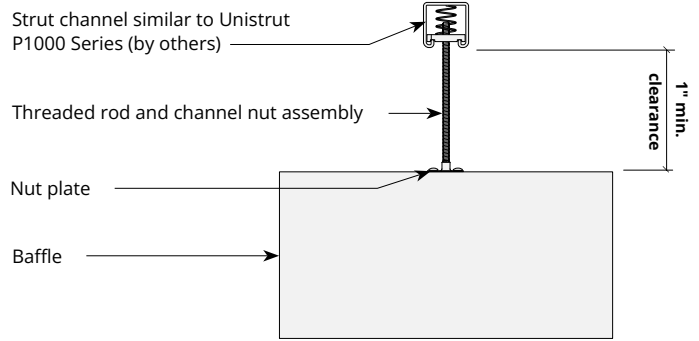

Hardware Kits:
HK1277 - 24" Cable
HK1278 - 48" Cable


Twist lock to T-grid

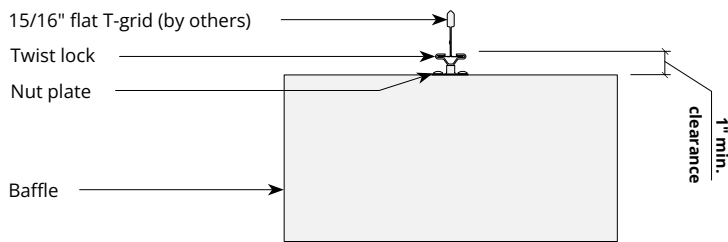

Hardware Kits:
HK1017

Acoustic Performance

Test Method	ASTM E795-16
Install Method	J-600
Rating Method	ASTM C423-17
Mounting Method	Sample tested 5 baffles 110" L x 12" D x 3" T, hanging 600mm from floor and 152mm from each other
Test Results	NRC 1.65 SAA 1.68

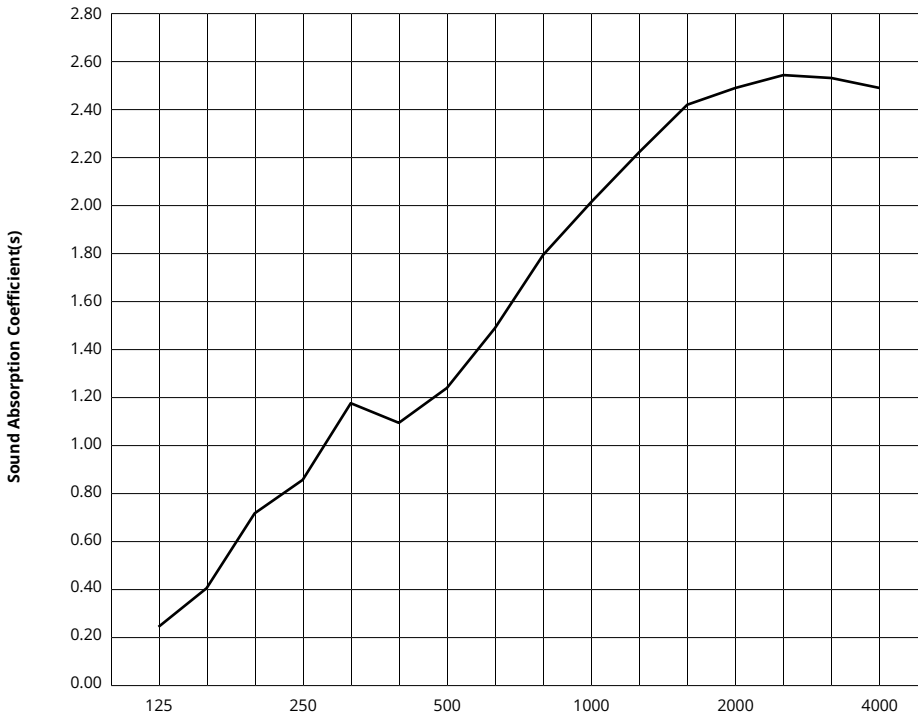


Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
12mm	0.26	0.86	1.25	2.02	2.49	2.49	1.65

What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.

 For questions or additional product information, visit acoufelt.com or call **800.966.8557**.

Billow Ceiling Baffles | January 2026