




## Creative Cut Wall Screens

Premier Collection

Creative Cut Screens use technical felt to provide space division and acoustic privacy, and still manages to preserve an open feel. Use a variety of patterns and colors to bring dimension to your built environment.

## Specifications

|                       |                                                                                |               |
|-----------------------|--------------------------------------------------------------------------------|---------------|
| <b>Surface</b>        | Wall                                                                           |               |
| <b>Material</b>       | FilaSorb™ polyester felt                                                       |               |
| <b>Weight</b>         | 12mm, 0.49 lb./ft <sup>2</sup> (±10%)<br>24mm, 0.98 lb./ft <sup>2</sup> (±10%) |               |
| <b>Standard Sizes</b> | <b>Width</b>                                                                   | <b>Height</b> |
|                       | 48" W                                                                          | 96, 108" H    |
|                       | <i>Custom sizes available</i>                                                  |               |

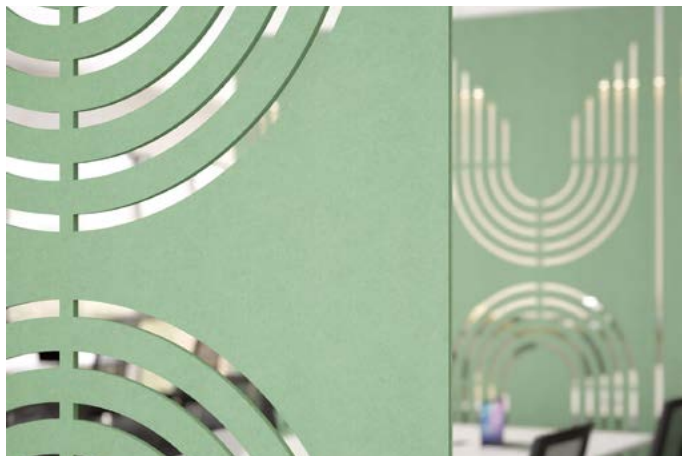

Creative Cut Wall Screen with Insignia Pattern in Sencha



Creative Cut Wall Screen with Pyramid Pattern in Turmeric

## Technical

|                       |                                                                                                |
|-----------------------|------------------------------------------------------------------------------------------------|
| <b>NRC Rating</b>     | <b>12mm*</b><br>0.45, no air gap<br><b>24mm*</b><br>0.60, no air gap                           |
| <b>Fire Test</b>      | ASTM E84, Class A<br>CAN/ULC-S102<br>Flame spread index: 15<br>Smoke developed index: 200      |
| <b>Water Sorption</b> | ASTM C1104-2019 (A Modified)<br>Water sorbed by weight: 0.20%<br>(based on a 12mm thick panel) |
| <b>Colorfastness</b>  | ISO 105-B02, 6-7                                                                               |

\* Test results available upon request

## Details

|                  |                                                |
|------------------|------------------------------------------------|
| <b>Lead Time</b> | 3 – 6 weeks                                    |
| <b>Origin</b>    | Manufactured and assembled in the US           |
| <b>Warranty</b>  | Product: 20 years*<br>Colorfastness: 20 years* |

\* Conditions apply

## Environmental

|                           |                                                                                                                                                                                    |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Recycled Content</b>   | Minimum 60%                                                                                                                                                                        |
| <b>Energy</b>             | Generated using 40% solar energy                                                                                                                                                   |
| <b>Indoor Air Quality</b> | VOC less than/equal to 0.5mg/m3                                                                                                                                                    |
| <b>Recyclable</b>         | 100%*                                                                                                                                                                              |
| <b>Certifications</b>     | Health Product Declaration (HPD)**<br>Environmental Product Declaration<br>Declare Certification - LBC Red List Free<br>(third-party verified)<br>SCS Global Indoor Advantage Gold |

\* PET is recyclable through participating partners

\*\* HPD only applies to 12mm thickness



® The Health Product Declaration® logo is a registered trademark of HPD Collaborative.



For questions or additional product information, visit [acoufelt.com](http://acoufelt.com) or call **800.966.8557**.

Creative Cut Screens | January 2026

# Colorways

## PREMIER



White  
WH12



Milkyway  
MI74



Ivory  
IV11



Pearl  
PE21



Valentine  
VA70



Quartz  
QU67



Stonewash  
ST72



Sea Salt  
SE57




Platinum  
PL04



Almond  
AL55



Pistachio  
PI25



Turmeric  
TU60



Flamingo  
FL61



Amethyst  
AM69



Periwinkle  
PE23



Peacock  
PE20



Metal  
ME03



Mushroom  
MU75




Celery  
CE65



Wheat  
WH68



Peach  
PE19



Lilac  
LI13



Marine  
MA15



Sencha  
SE58




Grey  
GR02




Umber  
UM54



Wasabi  
WA29



Popcorn  
PO26



Currant  
CU59



Berry  
BE06



Azure  
AZ05



Oregano  
OR18




Charcoal  
CH01




Walnut  
WA56




Eucalyptus  
EU71




Carrot  
CA08



Loganberry  
LO77




Granite  
GR62



Denim  
DE09



Kale  
KA12




Piano Black  
PI24




Slate  
SL27




Nori  
NO76




Peppercorn  
PE22



Shiraz  
SH63



Flint  
FL64



Midnight  
MI16

Order samples at [acoufelt.com/colorways](https://acoufelt.com/colorways)



For questions or additional product information,  
visit [acoufelt.com](https://acoufelt.com) or call 800.966.8557.


Creative Cut Screens | January 2026

# Sizes


**Standard Sizes** 48" W x 96, 108" H  
*Custom sizes available*

---

**Plan**

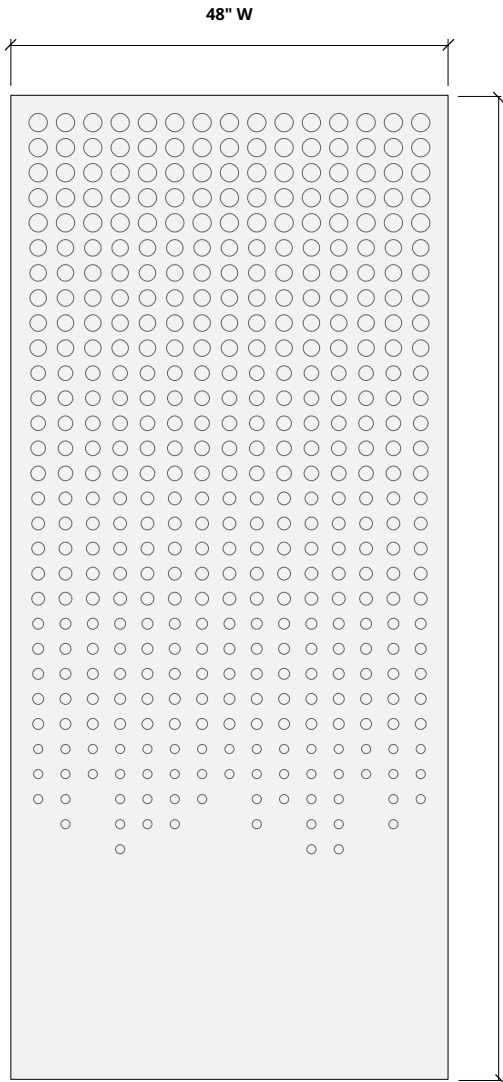

**Perspective**

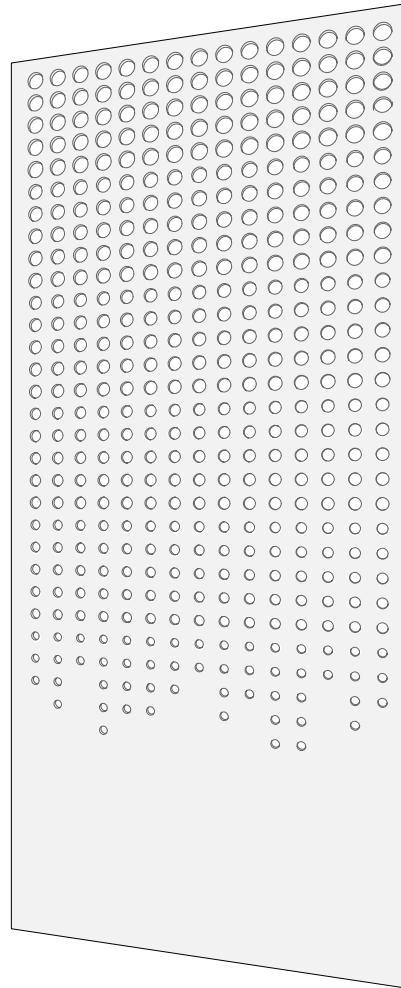

# How to Specify

## 1. Choose Panel Height

## 2. Choose Panel Design

## 3. Choose Colorway


Determine preferred material thickness and height.

## 1. Choose Panel Height


## 2. Choose Panel Design

## 3. Choose Colorway


Select desired panel design. See recommended layouts for larger designs.




BLIZZARD




FERN




INSIGNIA




ORIGAMI




PYRAMID




RADAR




RAIN




SKYSCRAPER




SONAR



TUNNEL



TURNTABLE



WATERFALL

## 1. Choose Panel Height

## 2. Choose Panel Design

## 3. Choose Colorway

Select colorways on page 3.



For questions or additional product information,  
visit [acoufelt.com](http://acoufelt.com) or call 800.966.8557.




Creative Cut Screens | January 2026

# Recommended Layouts

Blizzard: 96" H

Layout 1




Layout 2\*

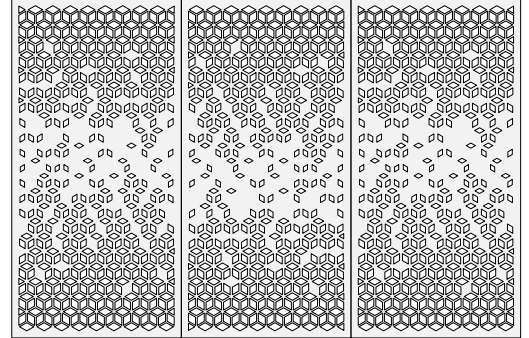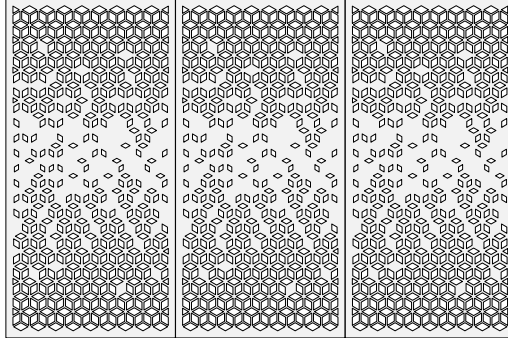

Blizzard: 108" H

Layout 1

Layout 2\*

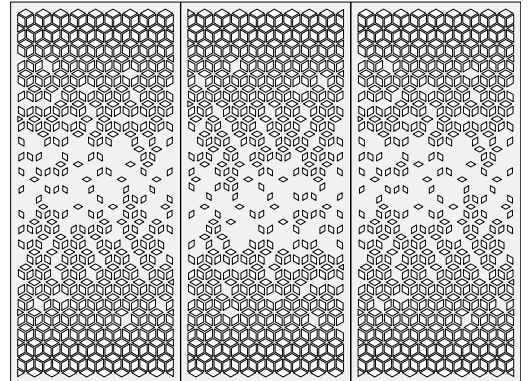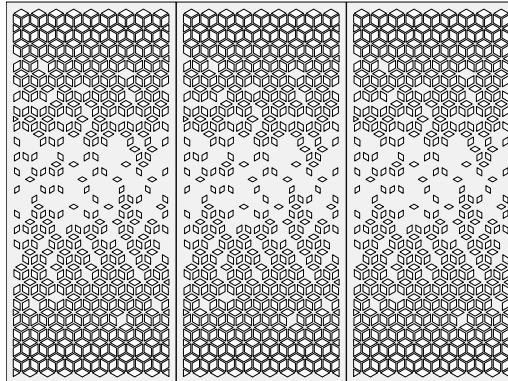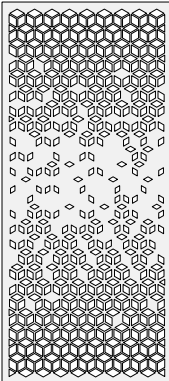




*\*Every other panel rotated 180°.*

# Recommended Layouts

Fern: 96" H

Layout 1



Layout 2\*

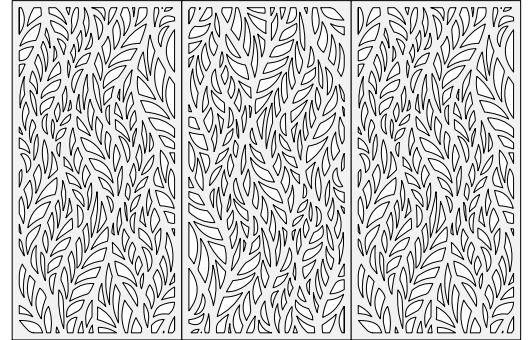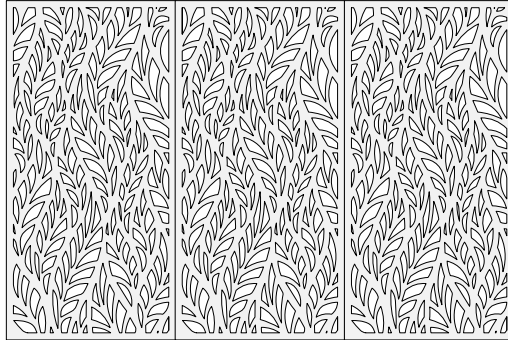

Fern: 108" H

Layout 1

Layout 2\*

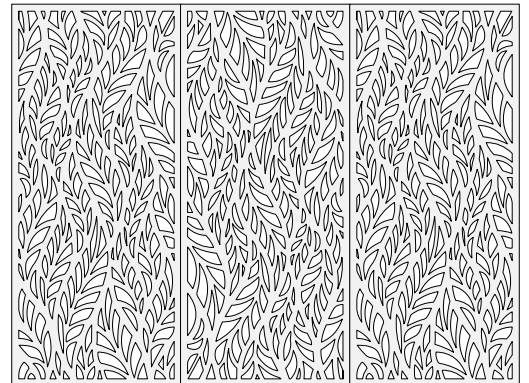
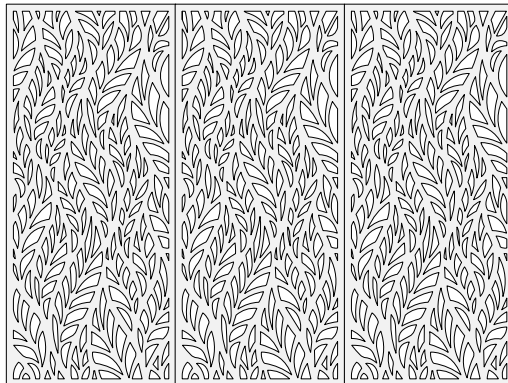


*\*Every other panel rotated 180°.*

# Recommended Layouts



Insignia: 96" H

Layout 1

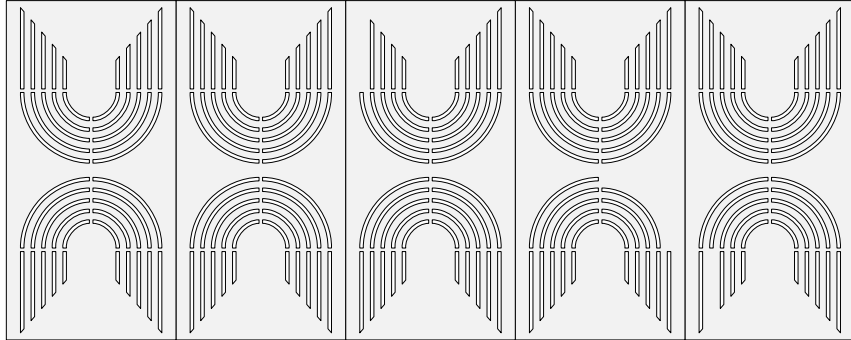

Insignia: 108" H

Layout 1


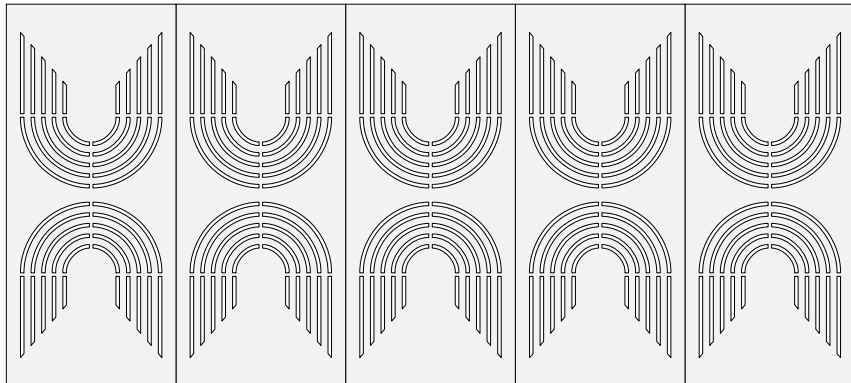



# Recommended Layouts

Origami: 96" H

Layout 1




Layout 2\*

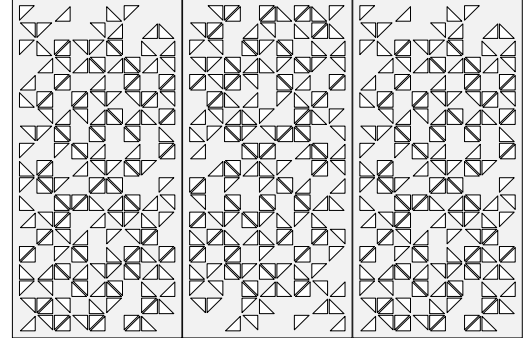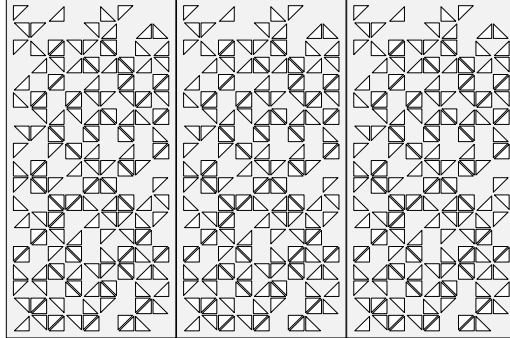

Origami: 108" H

Layout 1


Layout 2\*

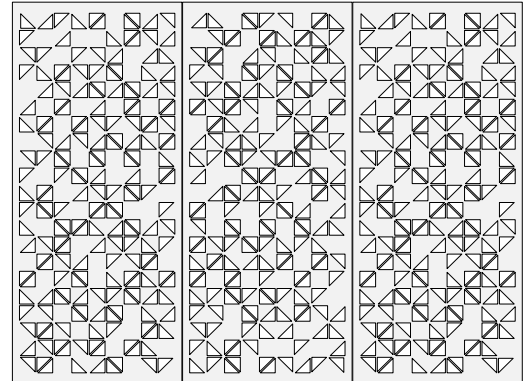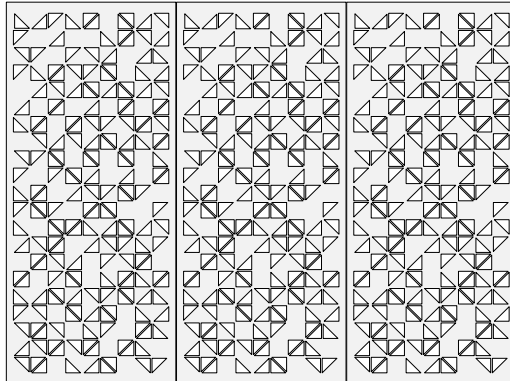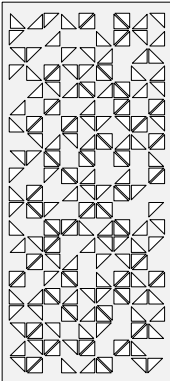


*\*Every other panel rotated 180°.*

# Recommended Layouts


Pyramid: 96" H




Layout 1

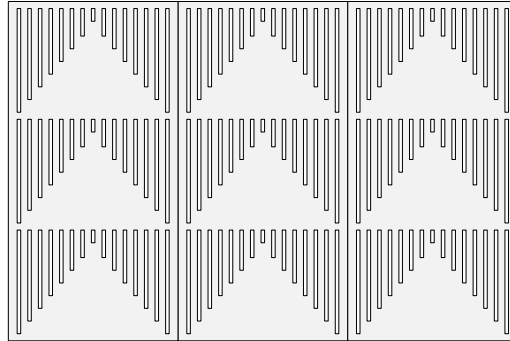


Layout 2\*

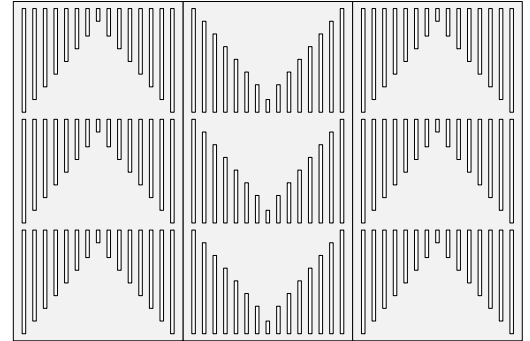


Pyramid: 108" H

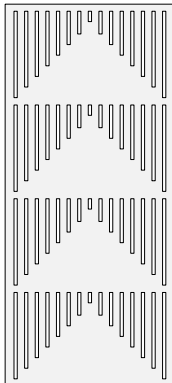

Layout 1

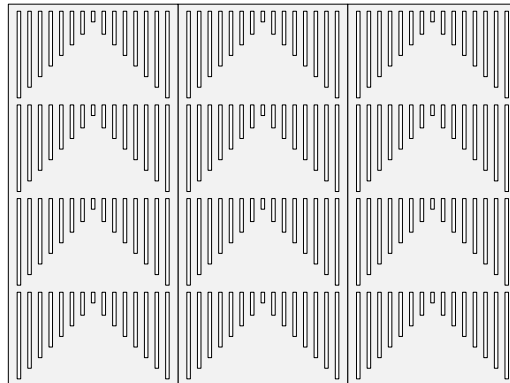

Layout 2\*

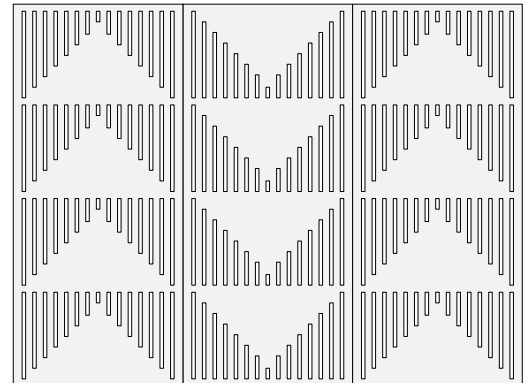




*\*Every other panel rotated 180°.*

# Recommended Layouts

Radar: 96" H

Layout 1




Layout 2

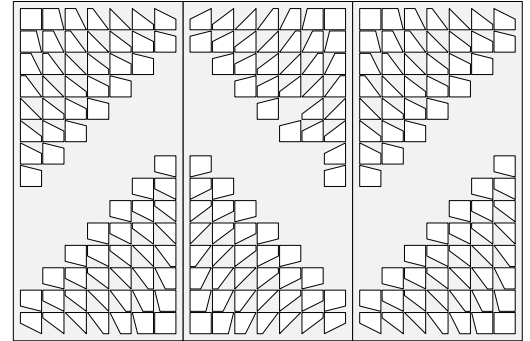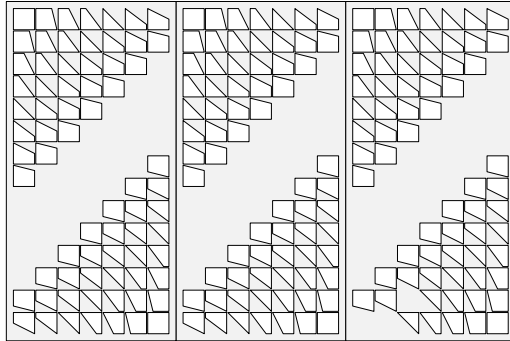

Radar: 108" H

Layout 1


Layout 2

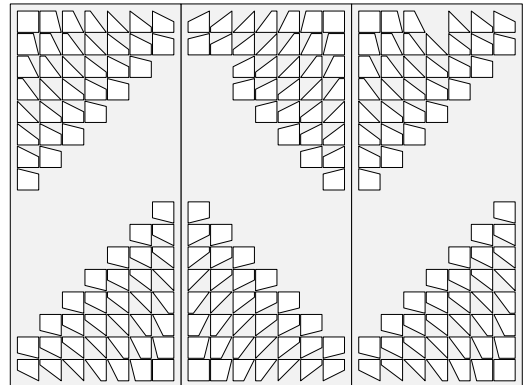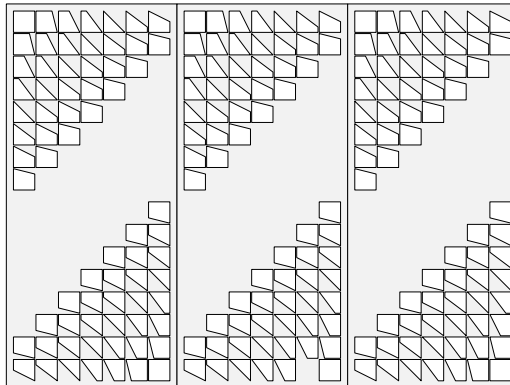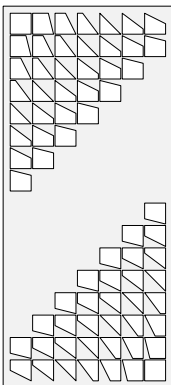


*\*Every other panel mirrored.*

# Recommended Layouts


Rain: 96" H




Layout 1

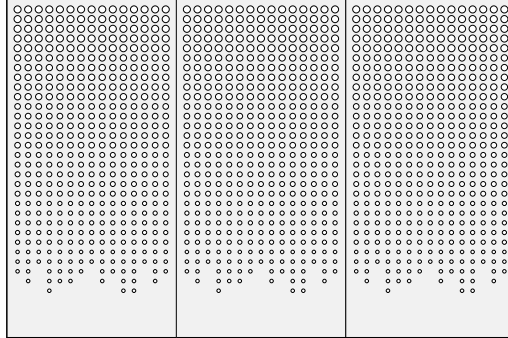


Layout 2\*

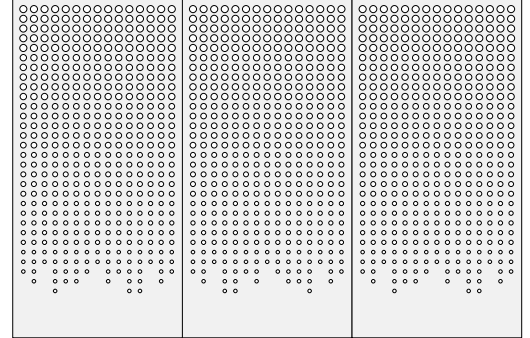


Rain: 108" H

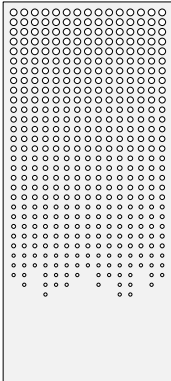

Layout 1

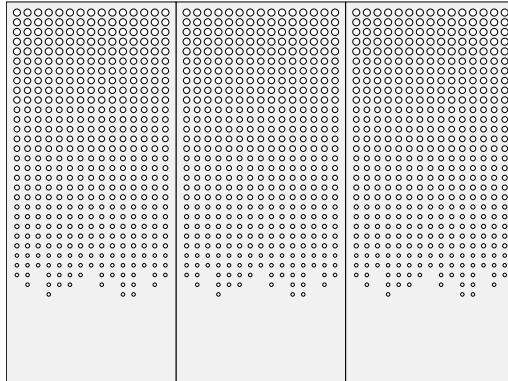

Layout 2\*

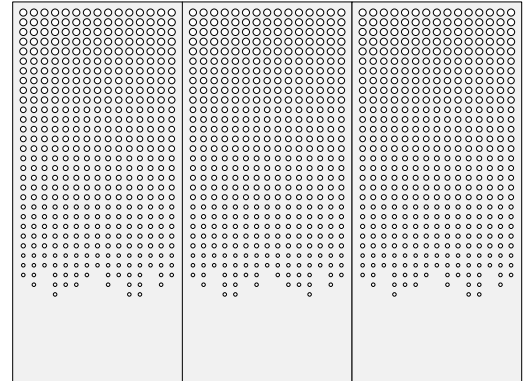




\*Every other panel mirrored.

# Recommended Layouts

Skyscraper: 96" H

Layout 1




Layout 2\*

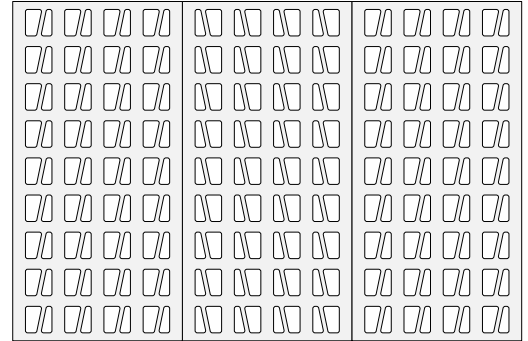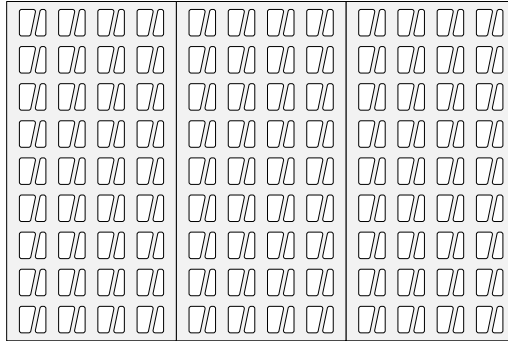

Skyscraper: 108" H

Layout 1

Layout 2\*

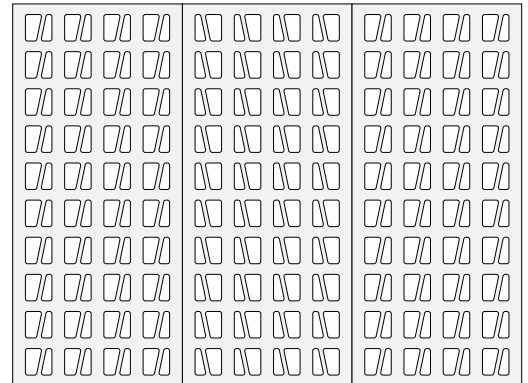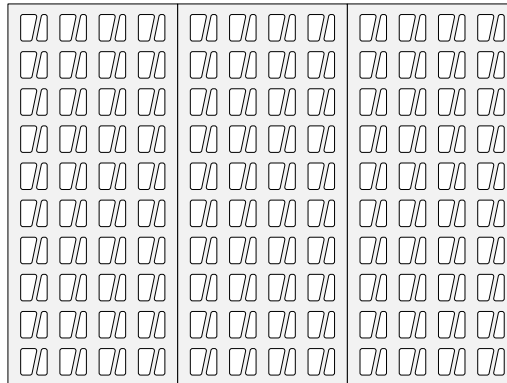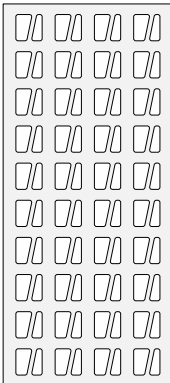




\* Every other panel mirrored.

# Recommended Layouts

Sonar: 96" H

Layout 1




Layout 2\*

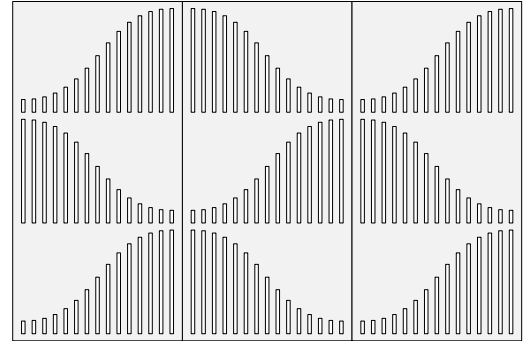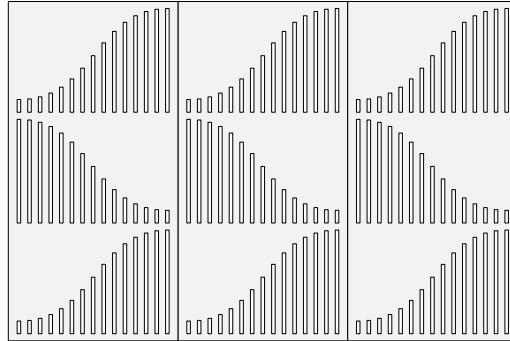

Sonar: 108" H

Layout 1

Layout 2\*

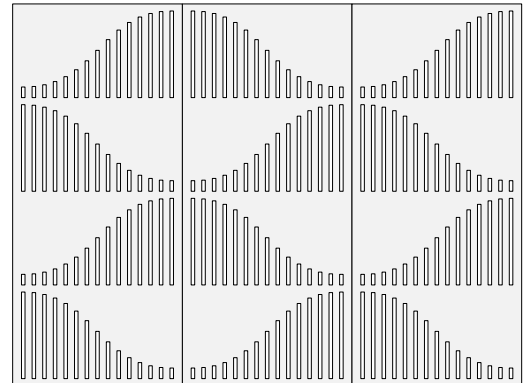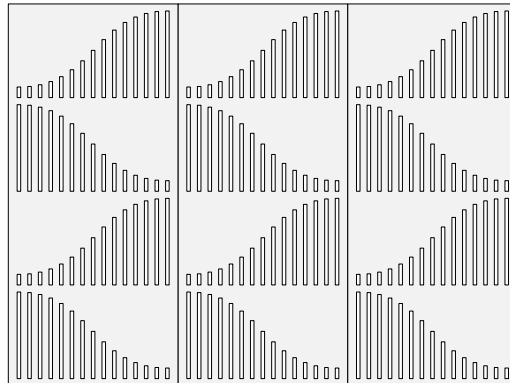




*\*Every other panel mirrored.*

# Recommended Layouts

Tunnel: 96" H

Layout 1




Layout 2\*

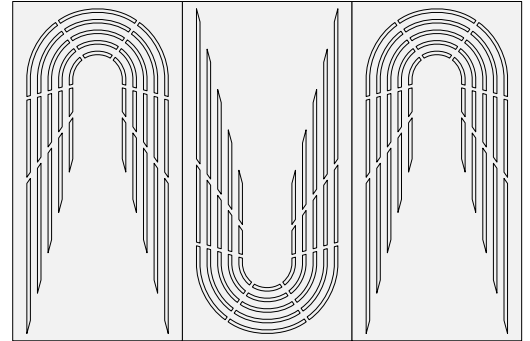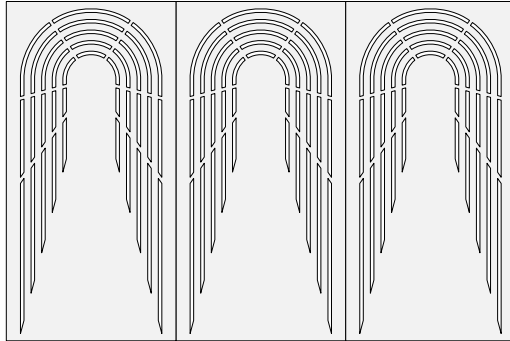

Tunnel: 108" H

Layout 1

Layout 2

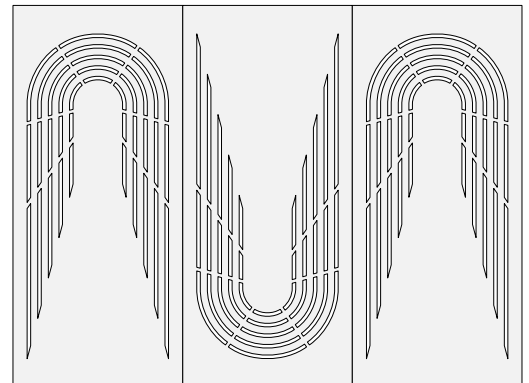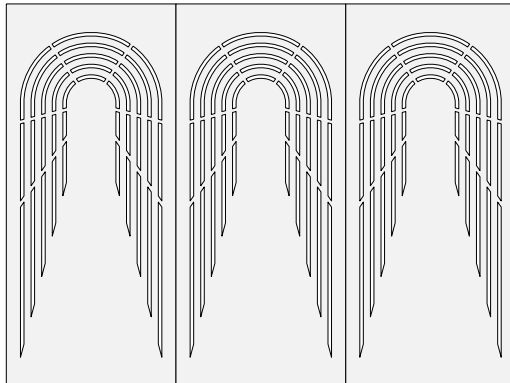




*\*Every other panel rotated 180°.*

# Recommended Layouts

**Turntable: 96" H**

**Layout 1**




**Layout 2\***

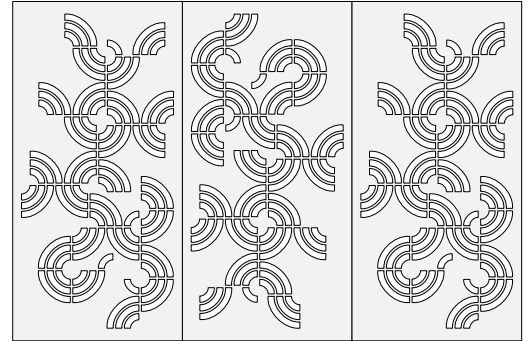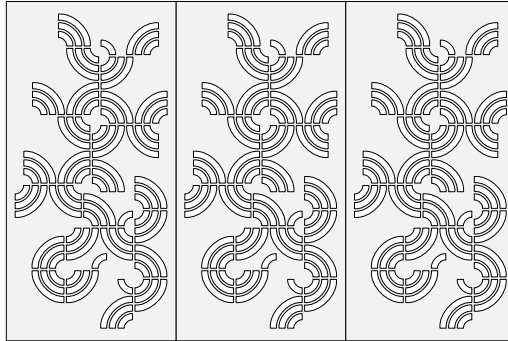

**Turntable: 108" H**

**Layout 1**

**Layout 2\***

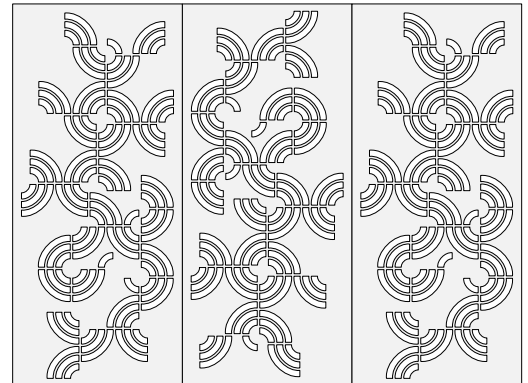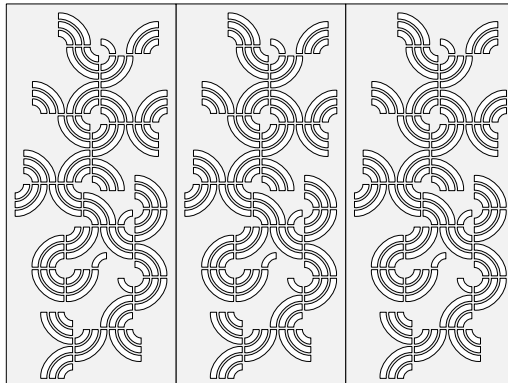




*\* Every other panel mirrored.*

# Recommended Layouts

Waterfall: 96" H

Layout 1




Layout 2\*

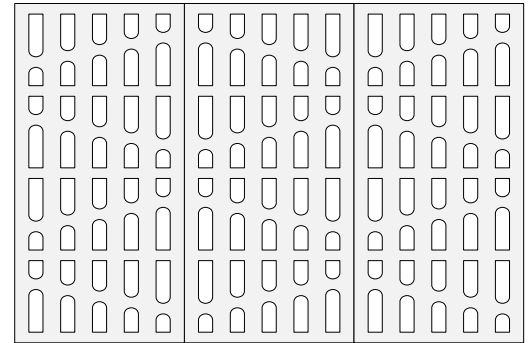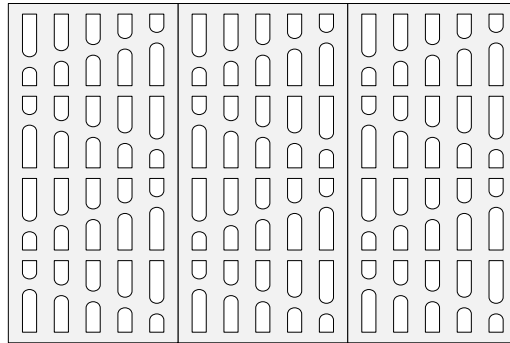

Waterfall: 108" H

Layout 1


Layout 2\*

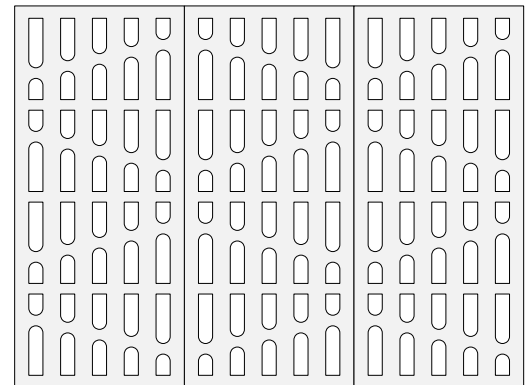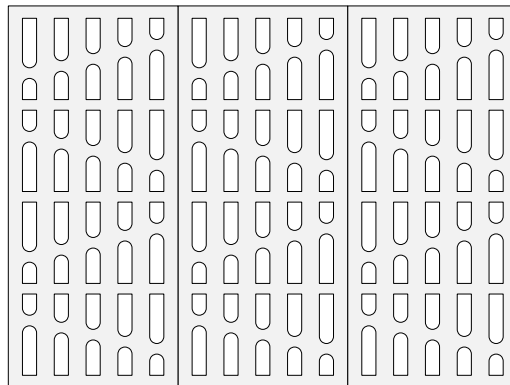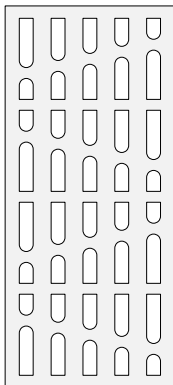


\* Every other panel mirrored.

# Mounting Methods: Sliding Track


**Ceiling mount sliding track elevation**

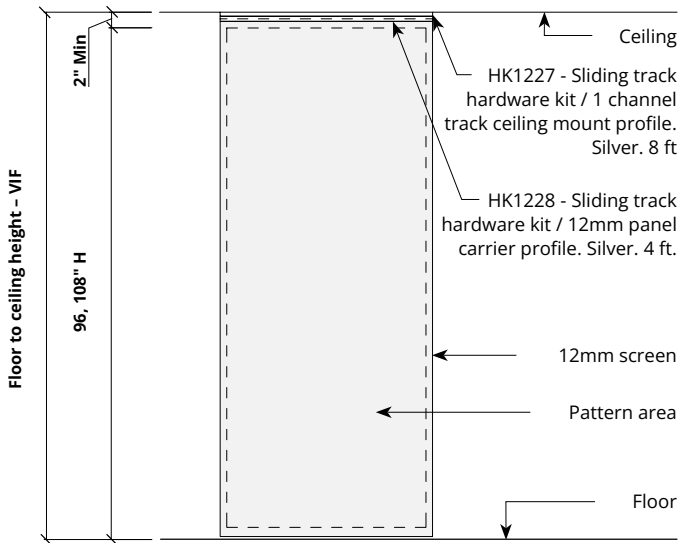


**Ceiling mount 1 channel sliding track section**

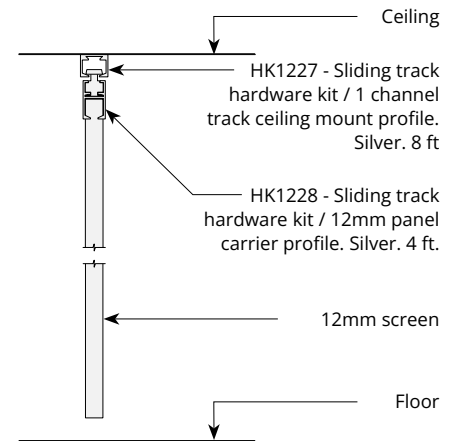

**Ceiling mount 3 channel sliding track section**

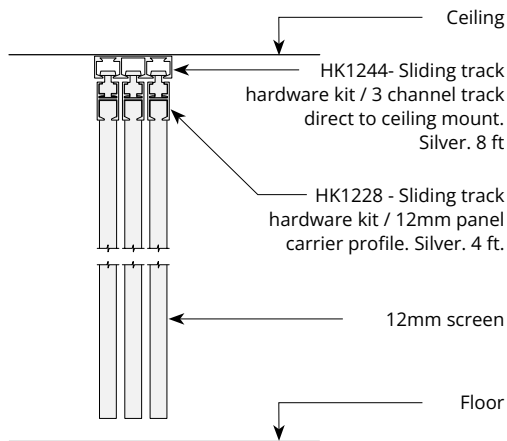


**Ceiling mount 5 channel sliding track section**

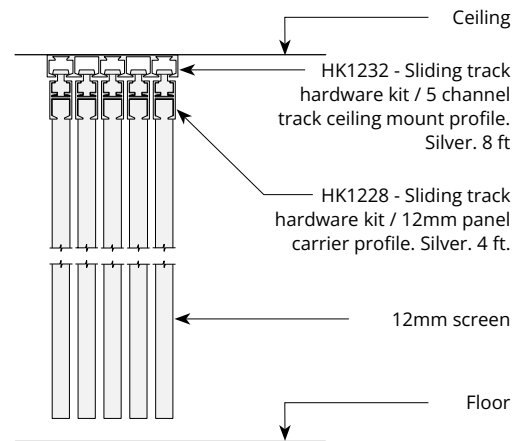


\* 2 channel and 4 channel sliding tracks are also available.  
Compatible with 12mm panels only.

# Mounting Methods: C-channel


Floor and ceiling mount c-channel elevation

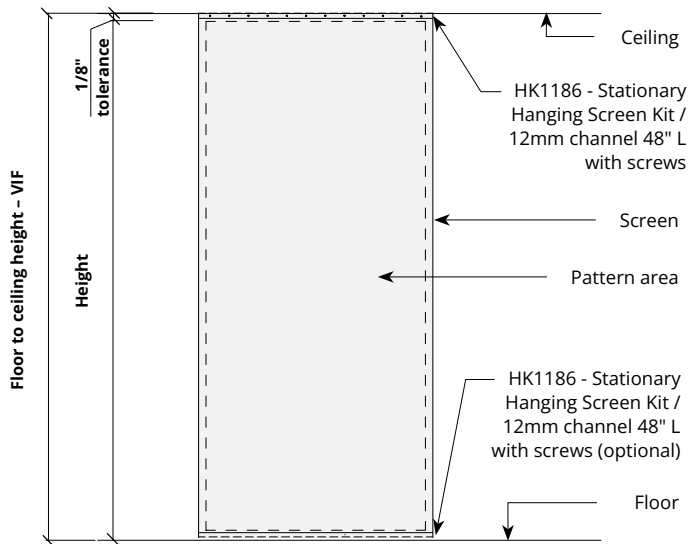


Floor to ceiling mount c-channel section

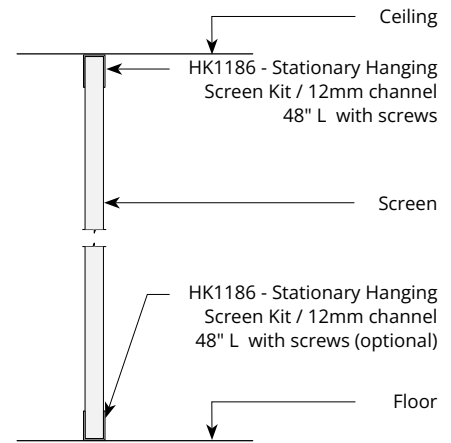

Ceiling mount c-channel elevation

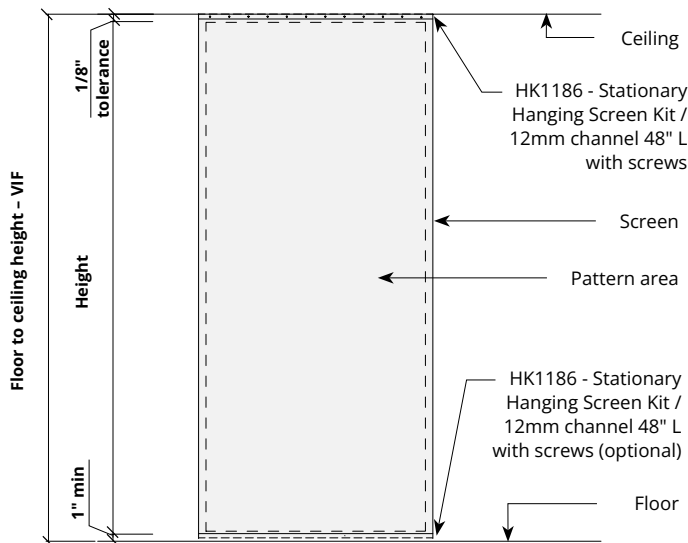


Ceiling mount c-channel section

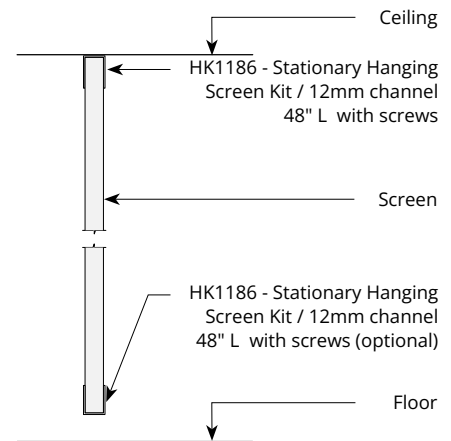


# Mounting Methods: Cable


Floor and ceiling mount cable elevation

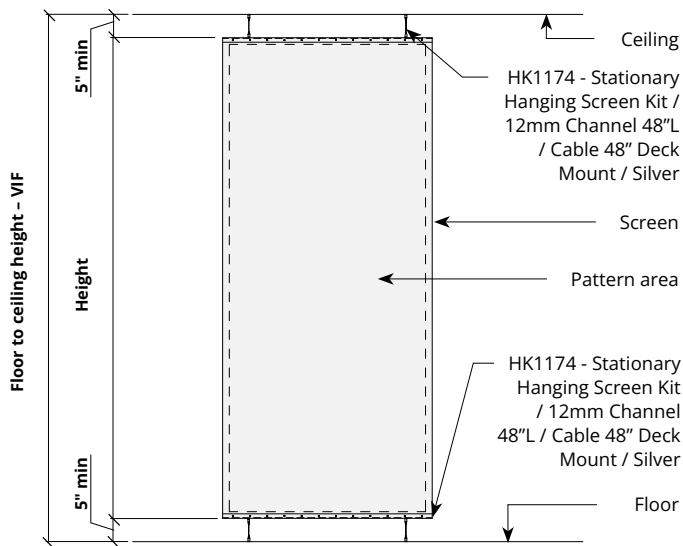


Floor and ceiling mount cable section

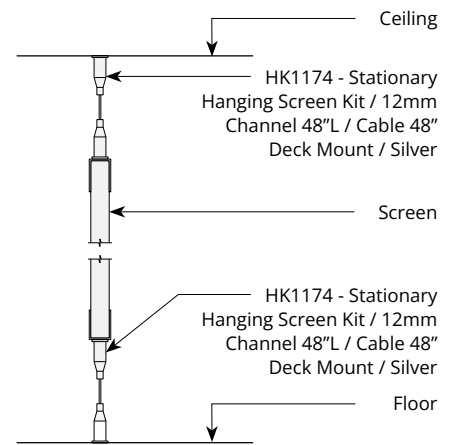

Ceiling mount cable with optional c-channel elevation

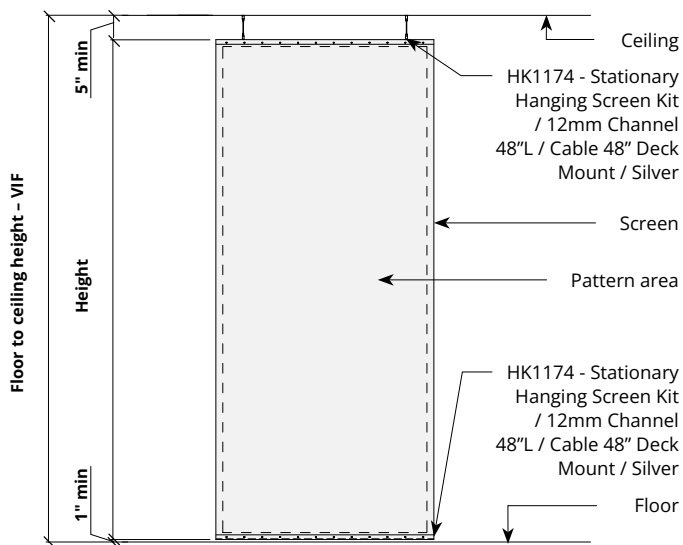


Ceiling mount cable with optional c-channel section

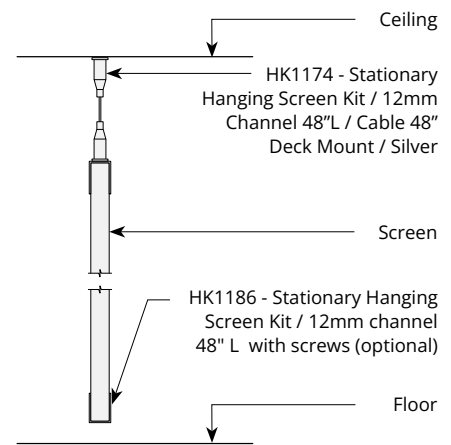


# Mounting Methods: Cable cont'd.

### Ceiling mount cable with floor mount c-channel elevation

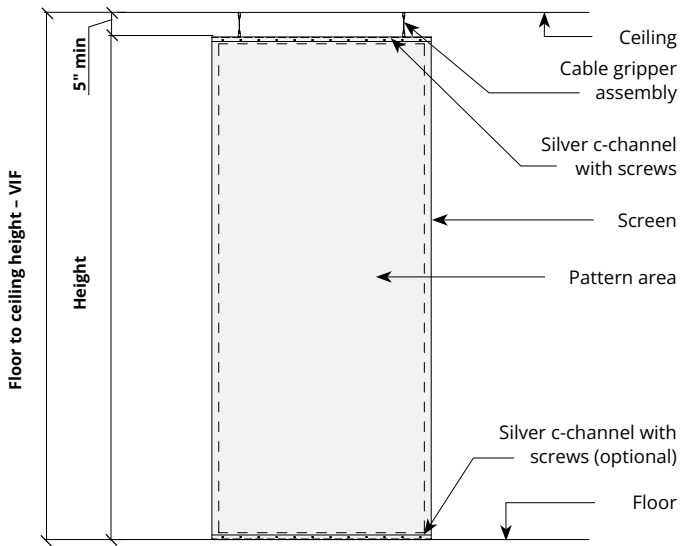

### Ceiling mount cable with floor mount c-channel section

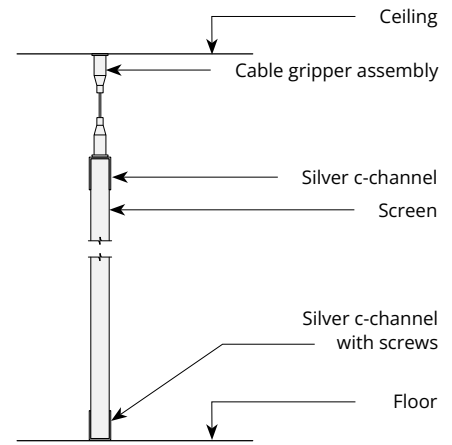


For questions or additional product information, visit [acoufelt.com](http://acoufelt.com) or call 800.966.8557.

Creative Cut Screens | January 2026

# Acoustic Performance

|                        |                                                                                           |
|------------------------|-------------------------------------------------------------------------------------------|
| <b>Test Method</b>     | ISO 354-2006                                                                              |
| <b>Install Method</b>  | No air gaps                                                                               |
| <b>Mounting Method</b> | Type A                                                                                    |
| <b>Rating Method</b>   | ASTM C423-09a                                                                             |
| <b>Test Results</b>    | <p><b>12mm</b><br/>NRC 0.45<br/>SAA 0.43</p> <p><b>24mm</b><br/>NRC 0.60<br/>SAA 0.55</p> |

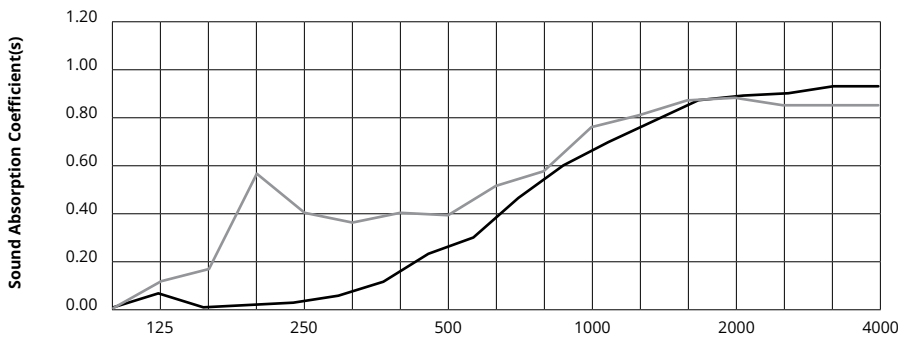


|  | Frequency f (Hz) | 125  | 250  | 500  | 1000 | 2000 | 4000 | NRC  |
|--|------------------|------|------|------|------|------|------|------|
|  | 12mm             | 0.06 | 0.02 | 0.23 | 0.61 | 0.89 | 0.95 | 0.45 |
|  | 24mm             | 0.02 | 0.57 | 0.41 | 0.58 | 0.87 | 0.85 | 0.60 |

## What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

*Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.*

 For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call **800.966.8557**.

Creative Cut Screens | January 2026