


Rail, Road Ceiling Frames

WoodGrain Collection

Road delivers application versatility with its beautifully simple, linear design that complements any architectural style. The effortless installation method, universal compatibility with standard grid sizes, and flexible format configurations promise optimal adaptability and increased comfort in any space.

Specifications

Surface	Ceiling	
Material	FilaSorb™ polyester felt	
Weight	0.49 lb./ft ² (±10%) 0.98 lb./ft ² (±10%)	
Standard Sizes	Slat Height	2", 4", and 6" H
	Slat Spacing	2", 4", 6", and 8" H
	Tile Size	24" W x 24" L 24" W x 48" L
Compatible T-grid	Type	Layout
	15/16" Flat	Standard 24" x 24"
	9/16" Flat	Standard 24" x 24"

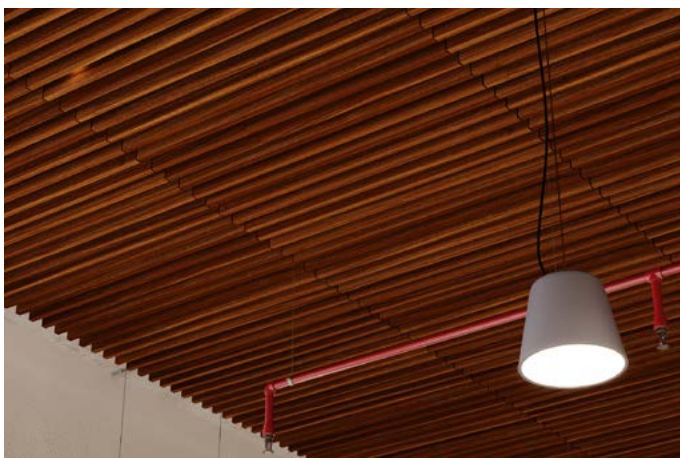

Rail, Road Ceiling Frames in Teak

Technical

NRC Rating	0.50*
Fire Test	ASTM E84, Class A CAN/ULC-S102 Flame spread index: 15 Smoke developed index: 200
Water Sorption	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
Colorfastness	ISO 105-B02, 6-7

* Test results available upon request.

Details

Lead Time	3 - 6 weeks
Origin	Manufactured and assembled in the US
Warranty	Product: 20 years* Colorfastness: 20 years*

* Conditions apply

Environmental

Recycled Content	Minimum 60%
Energy	Generated using 40% solar energy
Indoor Air Quality	VOC less than/equal to 0.5mg/m ³
Recyclable	100%*
Certifications	Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

* PET is recyclable through participating partners.



For questions or additional product information, visit acoufelt.com or call **800.966.8557**.

Rail, Road Ceiling Baffles | February 2026

Colorways

WOODGRAIN



Picket Fence
WQ01



Loft
WQ06



White Elm
WQ07



Lyed Larch
WQ30



White Oak
WQ13



Baltic Birch
WQ12



Knotty Spruce
WQ29



French Bobbin
WQ08




Boat Shed
WQ02



Nordic Plank
WQ15



Boardwalk
WQ10




Mocha Legno
WQ25



Mountain Lodge
WQ24



Wine Barrel
WQ03



Log Cabin
WQ04



Natural Oak
WQ16



Woodland Fog
WQ22



Driftwood
WQ21



Weathered Slate
WQ14



Petrified Ash
WQ23



Antique Chest
WQ11



European Larch
WQ17



Fumed Oak
WQ19



Teak
WQ18



Charred Larch
WQ09



Shadow Oak
WQ28



Barn Door
WQ05



Black Walnut
WQ20



Scorched Timber
WQ26



Espresso Oak
WQ27

Order samples at acoufelt.com/colorways




How to Specify

1. Choose Slat Height and Spacing

2. Choose Tile Size

3. Choose Colorway

Slats are available in three heights and multiple spacing options.


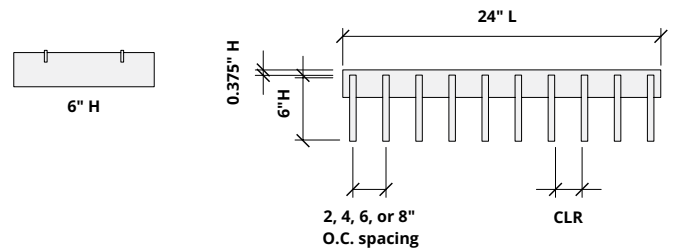
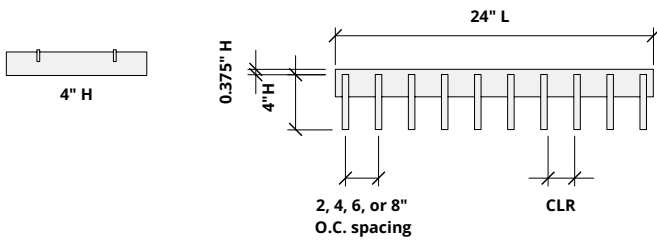
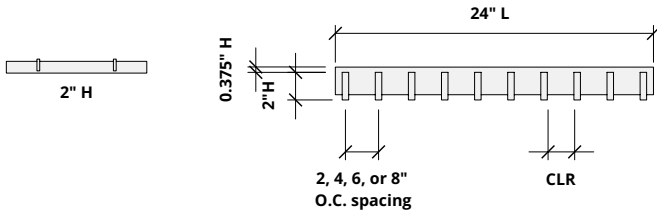


1. Choose Slat Height and Spacing

2. Choose Tile Size

3. Choose Colorway

Ties are available in three sizes for use with 2", 4" and 6" slats.

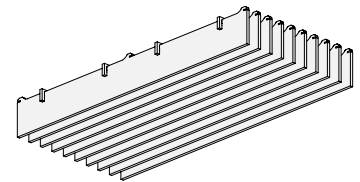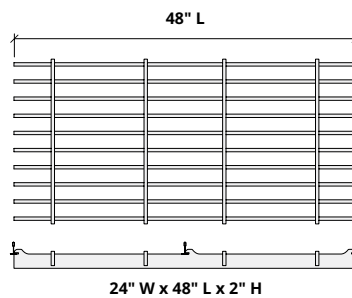

1. Choose Slat Height and Spacing

2. Choose Tile Size

3. Choose Colorway


Select one colorway for your tile. See colorway choices on page 3.




For questions or additional product information, visit acoufelt.com or call 800.966.8557.

Recommended Layouts


Layout 1

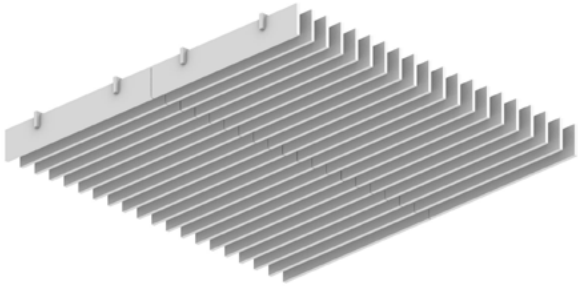


Layout 2

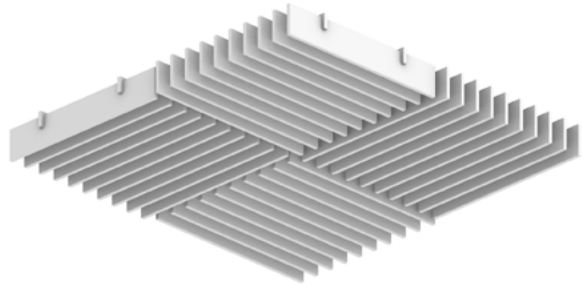

Layout 3

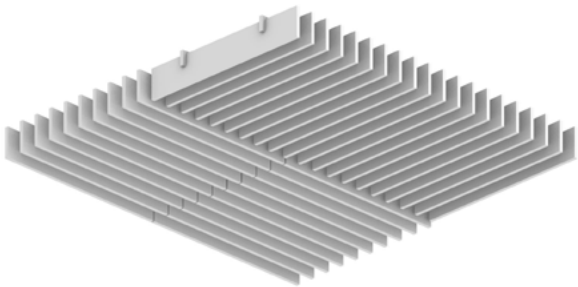


Layout 4

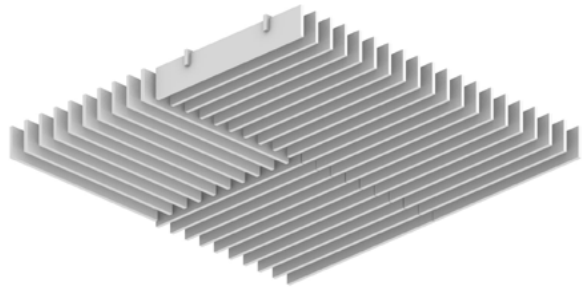


Lighting Coordination


2' x 2', 2' x 4' Grid light

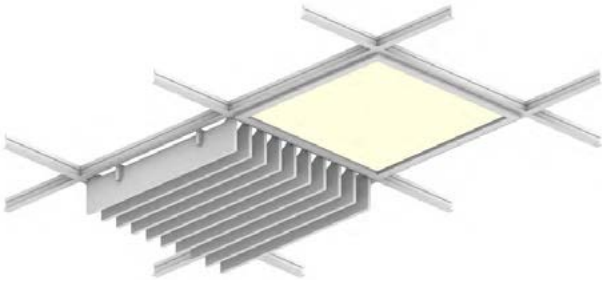


Drop pendant light

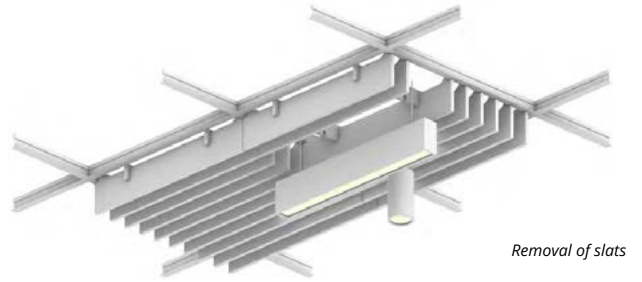

Recessed light

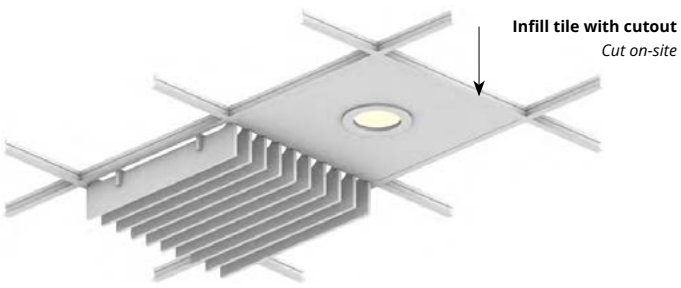


Grid mounted light (track, pendant)

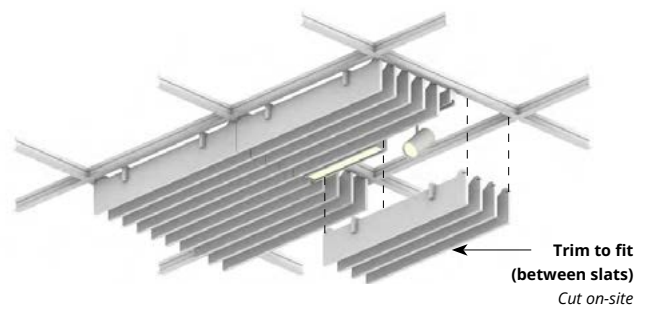

Acoustic Performance

Test Method	ASTM E795
Install Method	E-400
Rating Method	ASTM C423-17
Mounting Method	24" L x 24" W x 4" H Road with 400mm air gap
Test Results	NRC 0.50

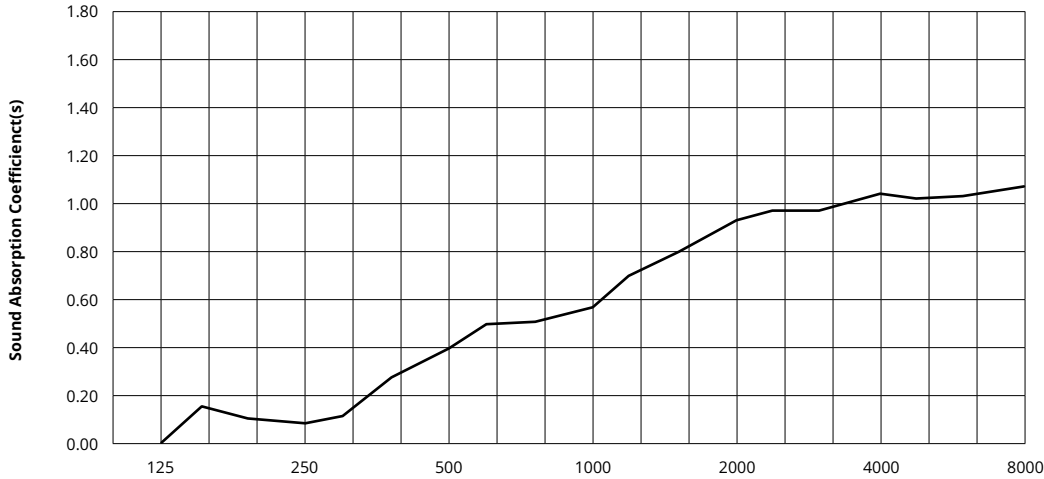


Frequency f (Hz)	125	250	500	1000	2000	4000	8000	NRC
12mm	0.00	0.08	0.39	0.56	0.92	1.03	1.06	0.50

What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.

 For questions or additional product information, visit acoufelt.com or call **800.966.8557**.

Rail, Road Ceiling Baffles | February 2026