



Blox, Deep Ceiling Clouds

Premier Collection

Pacify problematic sound by beautifully boxing up the racket. With a deeper-set insert to add greater contrast and drama, Blox ceiling clouds offer a fresh take on noise reduction while inviting you to customize your space with Premier colors from subtle to bold shades, realistic WoodGrain patterns, or a combination inside and out. Blox allows total creativity to blend sizes, play with color, and add lighting as you like.

Specifications

Surface	Ceiling
Material	FilaSorb™ polyester felt
Weight	0.49 lb./ft ² (±10%)
Standard Sizes	Width: 20" up to 44" W (2" increments) Length: 20" up to 44" L (2" increments) Height: 10" up to 20" H (2" increments)



Blox, Deep Ceiling Cloud in Pearl and White

** Any lighting depicted in renderings is for illustrative purposes only and is not included with the product. All lighting must be specified and coordinated by the project lighting designer or electrical engineer.*

Technical

NRC Rating	Pending product testing
Fire Test	ASTM E84, Class A CAN/ULC-S102 Flame spread index: 15 Smoke developed index: 200
Water Sorption	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
Colorfastness	ISO 105-B02, 6-7

Details

Lead Time	3 – 6 weeks
Origin	Manufactured and assembled in the US
Warranty	Product: 20 years* Colorfastness: 20 years*

** Conditions apply*

Environmental

Recycled Content	Minimum 60%
Energy	Generated using 40% solar energy
Indoor Air Quality	VOC less than/equal to 0.5mg/m3
Recyclable	100%*
Certifications	Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

** PET is recyclable through participating partners*



For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call **800.966.8557**.

Blox, Deep Ceiling Clouds | January 2026

Colorways

PREMIER



White
WH12



Milkyway
MI74



Ivory
IV11



Pearl
PE21



Valentine
VA70



Quartz
QU67



Stonewash
ST72



Sea Salt
SE57



Platinum
PL04



Almond
AL55



Pistachio
PI25



Turmeric
TU60



Flamingo
FL61




Amethyst
AM69



Periwinkle
PE23



Peacock
PE20



Metal
ME03



Mushroom
MU75



Celery
CE65



Wheat
WH68



Peach
PE19



Lilac
LI13



Marine
MA15




Sencha
SE58



Grey
GR02



Umber
UM54




Wasabi
WA29



Popcorn
PO26



Currant
CU59



Berry
BE06



Azure
AZ05



Oregano
OR18



Charcoal
CH01



Walnut
WA56



Eucalyptus
EU71




Carrot
CA08



Loganberry
LO77



Granite
GR62



Denim
DE09




Kale
KA12




Piano Black
PI24




Slate
SL27




Nori
NO76




Peppercorn
PE22



Shiraz
SH63




Flint
FL64



Midnight
MI16

Order samples at acoufelt.com/colorways

 For questions or additional product information, visit acoufelt.com or call 800.966.8557.

Blox, Deep Ceiling Clouds | January 2026



Sizes

Standard Width: 20" up to 44" W (2" increments)



Standard Height: 10" up to 20" H (2" increments)

Standard Length: 20" up to 44" L (2" increments)



Plan

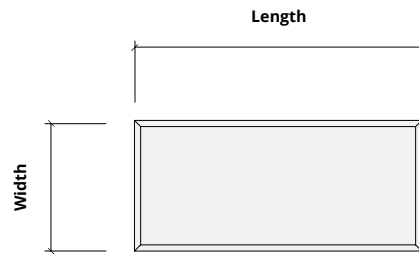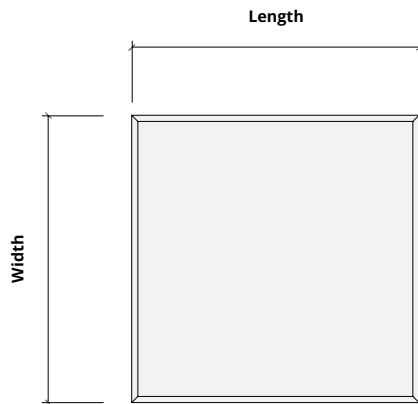

Elevations

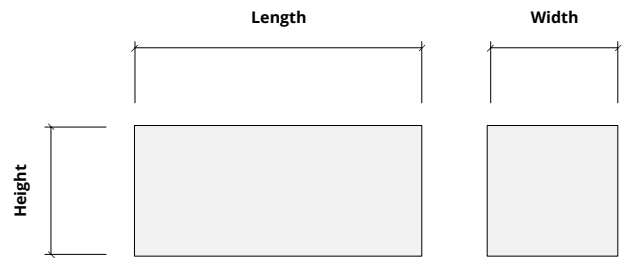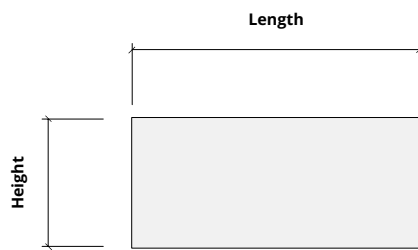



Perspective

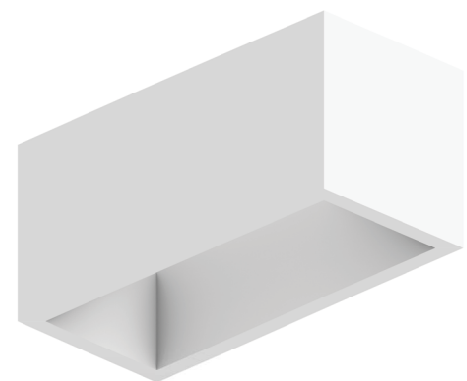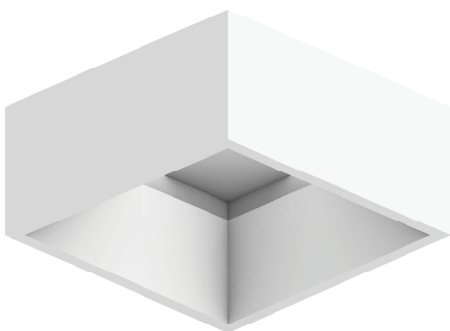

Hardware Spacing

20, 22, 24, 26, 28, 30" W	12" on center spacing
32, 34, 36, 38, 40, 42, 44, 48" W	24" on center spacing

20, 22, 24, 26, 28, 30" L	12" on center spacing
32, 34, 36, 38, 40, 42, 44" L	24" on center spacing

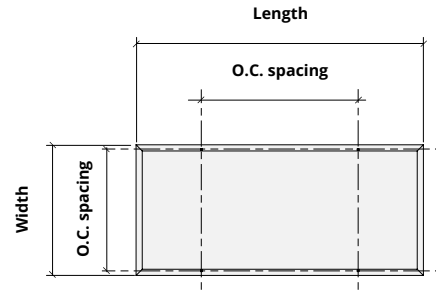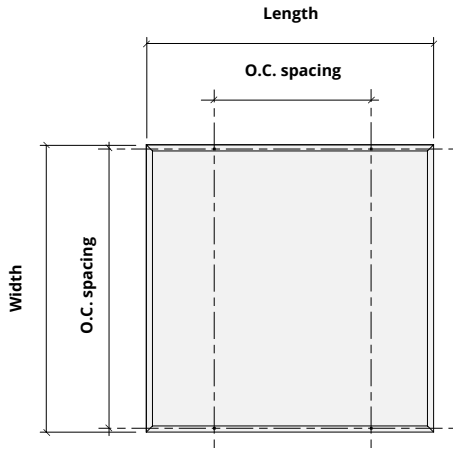

How to Specify

1. Choose Sizes

2. Choose Colorways

Blox sizes and shapes can be mixed to create the desired design. See Blox, Deep and Shallow specification sheets for additional information.


1. Choose Sizes

2. Choose Colorways

Select one or multiple colorways to achieve the overall desired design. See colorway choices on page 3.


Mounting Methods

Cable to deck

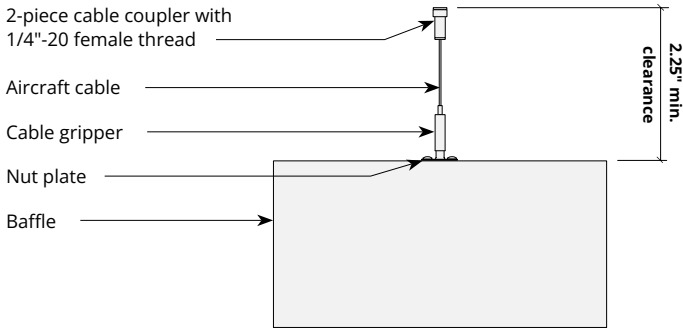


Hardware Kits:
 HK1006 - 48" Cable
 HK1010 - 120" Cable

Swivel cable to deck

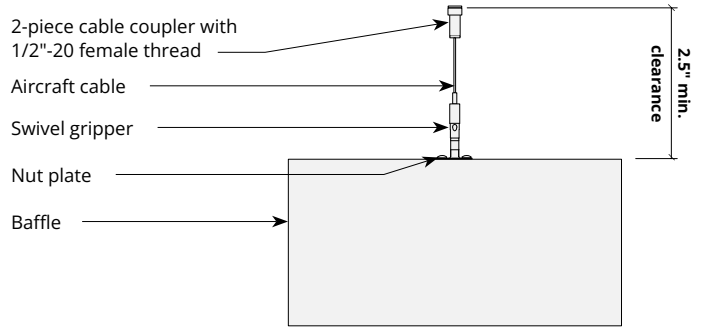


Hardware Kits:
 HK1007 - 48" Cable
 HK1011 - 120" Cable

Cable to strut channel

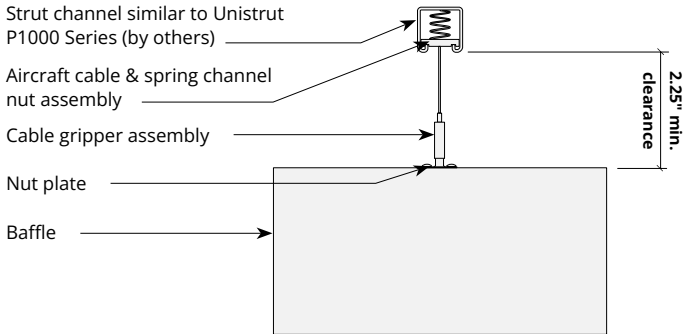


Hardware Kits:
 HK1009 - 48" Cable
 HK1013 - 120" Cable

Threaded rod

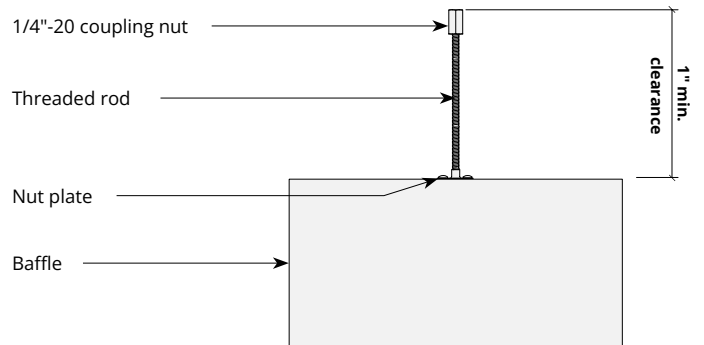


Hardware Kits:
 HK1014 - 24" Cable
 HK1015 - 48" Cable

Threaded rod to strut channel

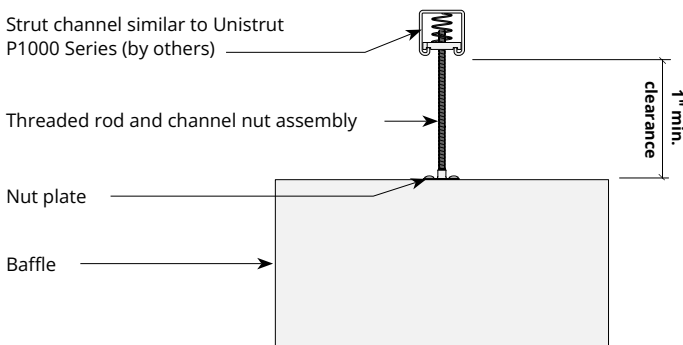

Hardware Kits:
 HK1277 - 24" Cable
 HK1278 - 48" Cable


Direct to strut channel

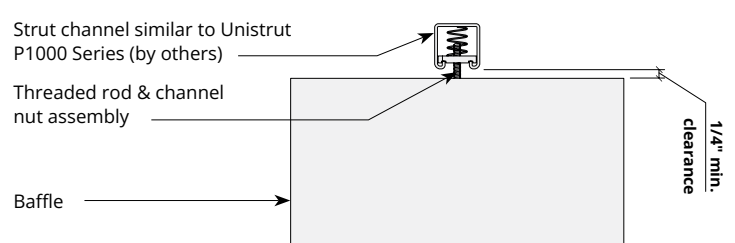

Hardware Kits:
 HK1016

Acoustic Performance

Test Method	ASTM E795-16
Install Method	J-600
Rating Method	ASTM C423-17
Mounting Method	Sample tested 5 baffles 110" L x 12" D x 3" thickness, hanging 600mm from floor and 152mm from each other
Test Results	Pending product testing

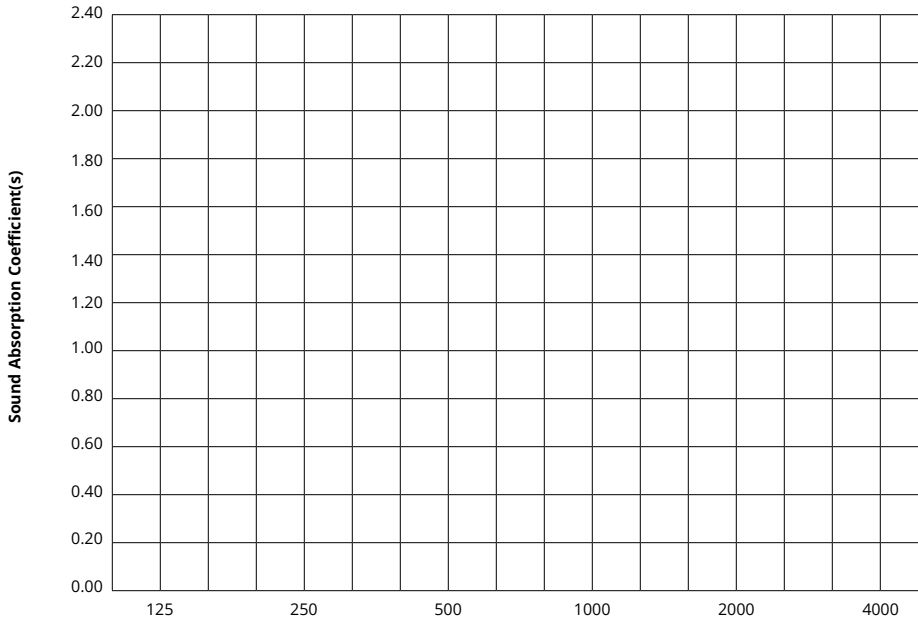


Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
12mm	Pending product testing						

What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.

 For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call **800.966.8557**.

Blox, Deep Ceiling Clouds | January 2026