

Pan

Ceiling Clouds

WoodGrain Collection

Pan is a dimensional ceiling cloud designed to make high-ceiling spaces feel more intimate and conversation-friendly. Its raised center sits higher than its perimeter, adding visual depth while enhancing sound absorption. With a range of sizes, widths, lengths, and heights available, Pan allows you to craft a customized, dynamic ceiling environment that perfectly suits your space.

Specifications

Surface	Ceiling		
Material	FilaSorb™ polyester felt		
Thickness	1/2", 12mm (±10%)		
Weight	0.49 lb./ft ² (±10%)		
Standard Sizes	Slat Thickness	Height	Width x Length
	1" T	4, 6, 8" H	24" W X 48" L 36" W x 36" L 48" W x 48" L



Pan Ceiling Cloud in Petrified Ash

Technical

NRC Rating	Pending product testing
Fire Test	ASTM E84, Class A Flame spread index: 15 Smoke developed index: 200
Water Sorption	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
Colorfastness	ISO 105-B02, 6-7

Details

Lead Time	3 – 6 weeks
Origin	Manufactured and assembled in the US
Warranty	Product: 20 years* Colorfastness: 20 years*

* Conditions apply

Environmental

Recycled Content	Minimum 60%
Energy	Generated using 40% solar energy
Indoor Air Quality	VOC less than/equal to 0.5mg/m3
Recyclable	100%*
Certifications	Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

* PET is recyclable through participating partners



For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call **800.966.8557**.

Pan Ceiling Clouds | January 2026

Colorways

WOODGRAIN



Picket Fence
WQ01



Loft
WQ06



White Elm
WQ07



Lyed Larch
WQ30




White Oak
WQ13



Baltic Birch
WQ12



Knotty Spruce
WQ29



French Bobbin
WQ08



Boat Shed
WQ02




Nordic Plank
WQ15



Boardwalk
WQ10



Mocha Legno
WQ25




Mountain Lodge
WQ24



Wine Barrel
WQ03



Log Cabin
WQ04



Natural Oak
WQ16



Woodland Fog
WQ22




Driftwood
WQ21



Weathered Slate
WQ14



Petrified Ash
WQ23




Antique Chest
WQ11



European Larch
WQ17



Fumed Oak
WQ19



Teak
WQ18



Charred Larch
WQ09




Shadow Oak
WQ28



Barn Door
WQ05



Black Walnut
WQ20



Scorched Timber
WQ26



Espresso Oak
WQ27


Order samples at acoufelt.com/colorways

Colorways

PREMIER

							
White WH12	Milkyway MI74	Ivory IV11	Pearl PE21	Valentine VA70	Quartz QU67	Stonewash ST72	Sea Salt SE57
							
Platinum PL04	Almond AL55	Pistachio PI25	Turmeric TU60	Flamingo FL61	Amethyst AM69	Periwinkle PE23	Peacock PE20
							
Metal ME03	Mushroom MU75	Celery CE65	Wheat WH68	Peach PE19	Lilac LI13	Marine MA15	Sencha SE58
							
Grey GR02	Umber UM54	Wasabi WA29	Popcorn PO26	Currant CU59	Berry BE06	Azure AZ05	Oregano OR18
							
Charcoal CH01	Walnut WA56	Eucalyptus EU71	Carrot CA08	Loganberry LO77	Granite GR62	Denim DE09	Kale KA12
							
Piano Black PI24	Slate SL27	Nori NO76	Peppercorn PE22	Shiraz SH63	Flint FL64	Midnight MI16	

Order samples at acoufelt.com/colorways



 For questions or additional product information, visit acoufelt.com or call 800.966.8557.

Pan Ceiling Clouds | January 2026



Sizes

Standard Sizes	Slat Thickness	Height	Width x Length
	1" T	4, 6, 8" H	24" W X 48" L 36" W x 36" L 48" W x 48" L

Plan

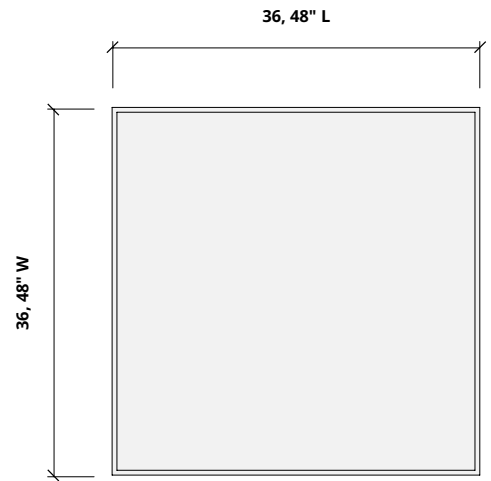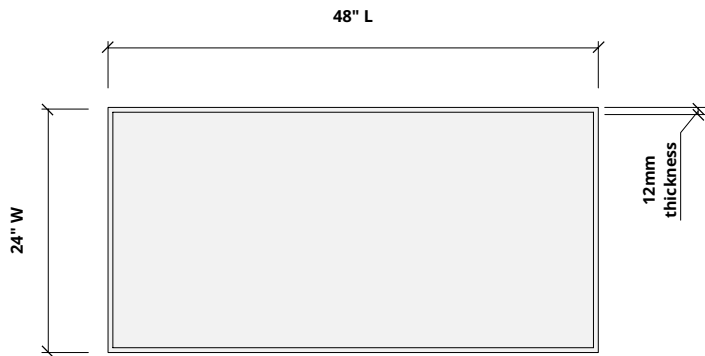

Elevation


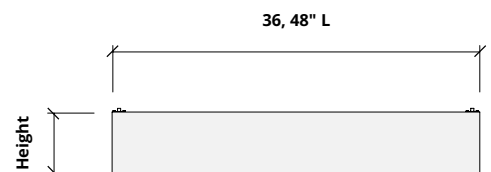
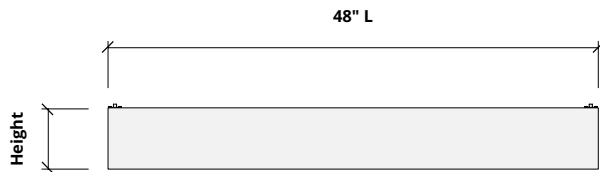


12mm
thickness



Hardware Spacing

24" W	22.58" on center spacing
36" W	24" on center spacing
48" W	36" on center spacing
36" L	34.58" on center spacing
48" L	46.58" on center spacing

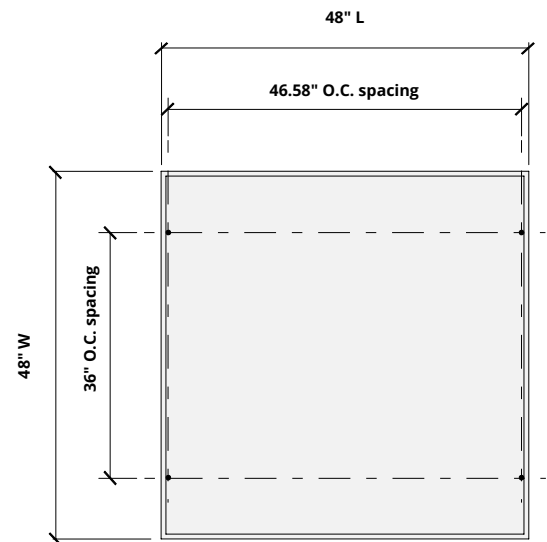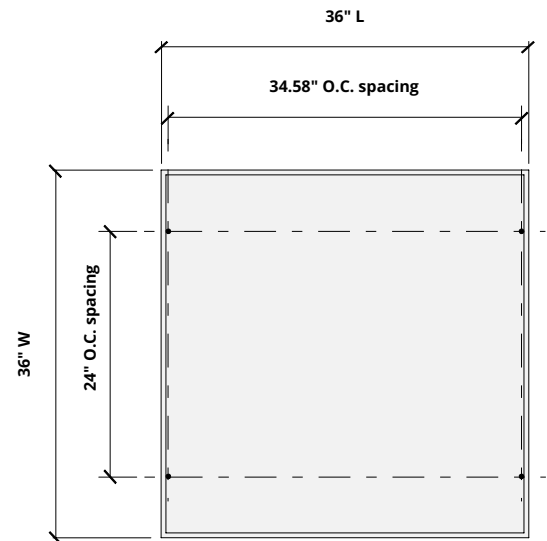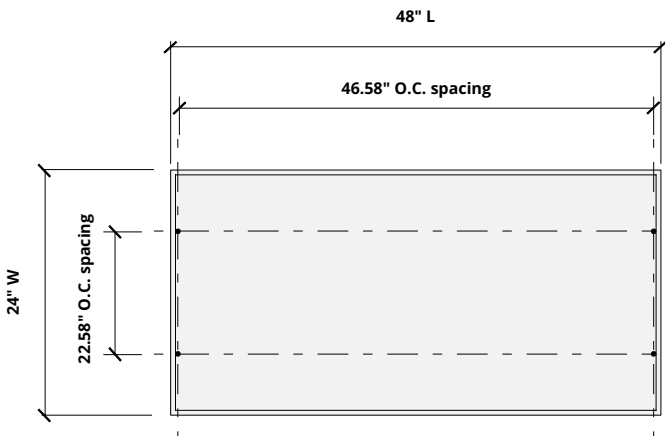

How to Specify

1. Choose Sizes

2. Choose Colorways

3. Choose Mounting Method


Select desired height and grid size.

1. Choose Sizes

2. Choose Colorway

3. Choose Mounting Method

Select one colorway for your slats and one colorway for your backer panel; or one colorway for both. See pages 3 and 4 for colorways.

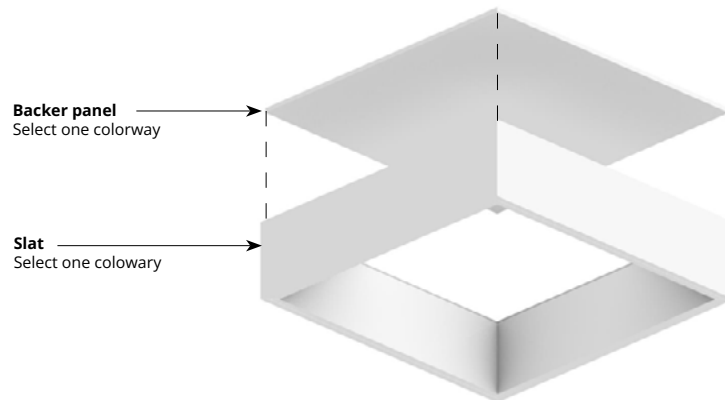

Product ships assembled.

1. Choose Sizes


2. Choose Colorway

3. Choose Mounting Method


There are several mounting methods available. Choose one that works best for your project needs and preferred aesthetic.

Mounting Methods


Cable

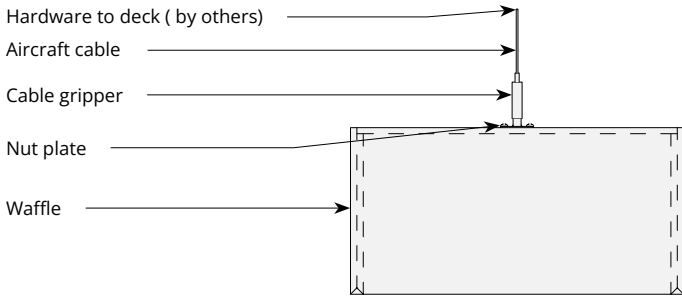


Cable to deck

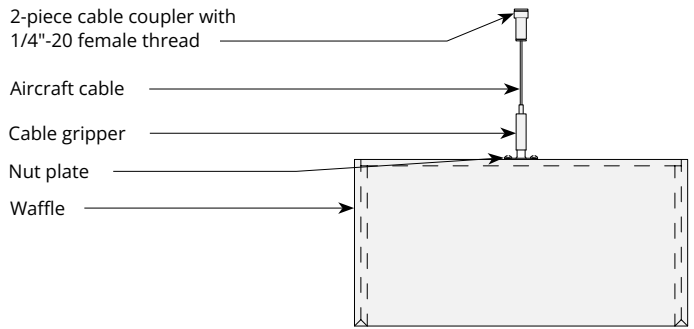

Swivel cable to deck

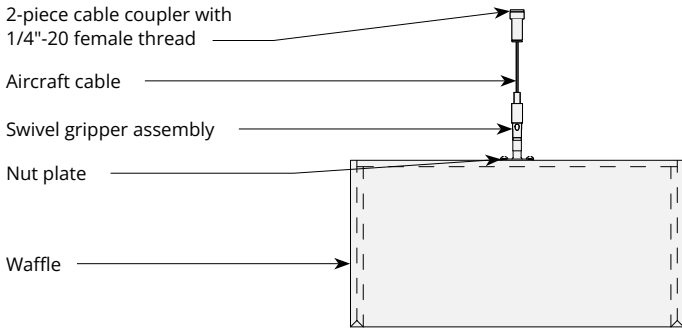


Cable to Unistrut

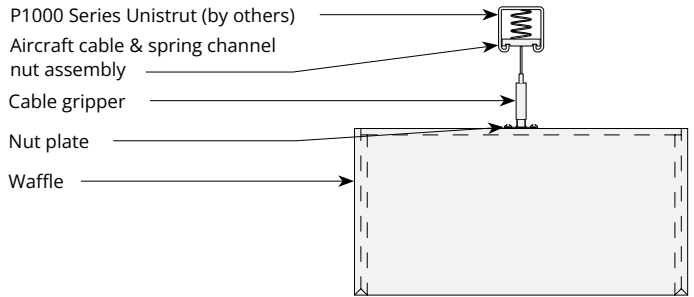

Acoustic Performance

Test Method	ASTM E795-16
Install Method	A
Rating Method	ISO 11654-1997
Test Results	Pending product testing

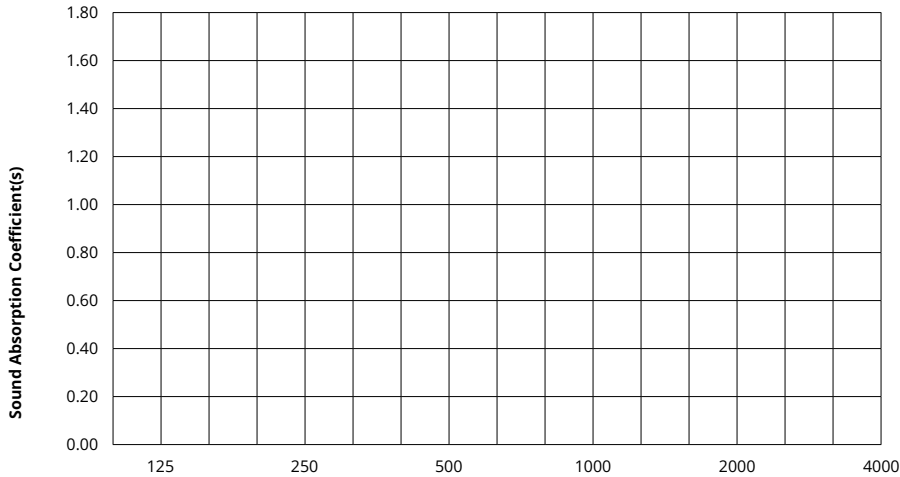


	Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
	12mm							

What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.

 For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call **800.966.8557**.

Pan Ceiling Clouds | January 2026