

Rail, Lines Ceiling Frames


Premier Collection

Rail Ceiling Frames offer unmatched flexibility to craft unique, textured ceilings. With an open-tile design and the absence of a backer, Rail seamlessly integrates with essential ceiling components like lighting, sprinklers, and speakers.

The Rail frames system ensures hassle-free installation with its innovative click-in design, eliminating the need for additional hardware. Fully compatible with standard 15/16" T-grid drop ceilings, it provides a versatile and efficient solution for modern ceiling designs.

Specifications

| | | |
|--------------------------|--|--------------------|
| Surface | Ceiling | |
| Material | FilaSorb™ polyester felt | |
| Weight | 0.49 lb./ft ² (±10%) 0.98 lb./ft ² (±10%) | |
| Standard Sizes | 24" W x 24" L x 4" H 24" W x 24" L x 6" H 24" W x 48" L x 4" H 24" W x 48" L x 6" H | |
| Compatible T-grid | Type | Layout |
| | 15/16" Flat | Standard 24" x 24" |
| | 9/16" Flat | Standard 24" x 24" |

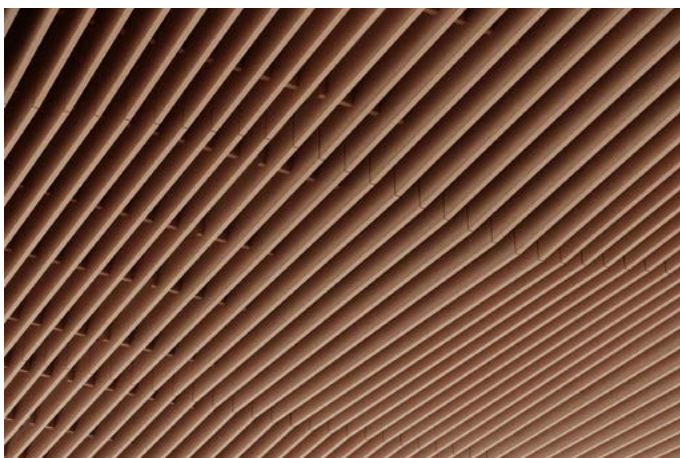

Rail, Lines Ceiling Frames in Quartz

Technical

| | |
|-----------------------|--|
| NRC Rating | Pending product testing |
| Fire Test | ASTM E84, Class A Flame spread index: 15 Smoke developed index: 200 |
| Water Sorption | ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel) |
| Colorfastness | ISO 105-B02, 6-7 |

Details

| | |
|------------------|--|
| Lead Time | 3 – 6 weeks |
| Origin | Manufactured and assembled in the US |
| Warranty | Product: 20 years* Colorfastness: 20 years* |

* Conditions apply

Environmental

| | |
|---------------------------|---|
| Recycled Content | Minimum 60% |
| Energy | Generated using 40% solar energy |
| Indoor Air Quality | VOC less than/equal to 0.5mg/m3 |
| Recyclable | 100%* |
| Certifications | Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold |

* PET is recyclable through participating partners



For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call 800.966.8557.


Rail, Lines Ceiling Frames | February 2026

Colorways

PREMIER

| | | | | | | | |
|--|---|---|---|---|--|---|---|
|  |  |  |  |  |  |  |  |
| White WH12 | Milkyway MI74 | Ivory IV11 | Pearl PE21 | Valentine VA70 | Quartz QU67 | Stonewash ST72 | Sea Salt SE57 |
|  |  |  |  |  |  |  |  |
| Platinum PL04 | Almond AL55 | Pistachio PI25 | Turmeric TU60 | Flamingo FL61 | Amethyst AM69 | Periwinkle PE23 | Peacock PE20 |
|  |  |  |  |  |  |  |  |
| Metal ME03 | Mushroom MU75 | Celery CE65 | Wheat WH68 | Peach PE19 | Lilac LI13 | Marine MA15 | Sencha SE58 |
|  |  |  |  |  |  |  |  |
| Grey GR02 | Umber UM54 | Wasabi WA29 | Popcorn PO26 | Currant CU59 | Berry BE06 | Azure AZ05 | Oregano OR18 |
|  |  |  |  |  |  |  |  |
| Charcoal CH01 | Walnut WA56 | Eucalyptus EU71 | Carrot CA08 | Loganberry LO77 | Granite GR62 | Denim DE09 | Kale KA12 |
|  |  |  |  |  |  |  | |
| Piano Black PI24 | Slate SL27 | Nori NO76 | Peppercorn PE22 | Shiraz SH63 | Flint FL64 | Midnight MI16 | |

Order samples at acoufelt.com/colorways

 For questions or additional product information, visit acoufelt.com or call 800.966.8557.

Rail, Lines Ceiling Frames | February 2026



How to Specify

1. Choose Slat Height

2. Choose Tile Size

3. Choose Colorway

Slats are available in two overall heights:

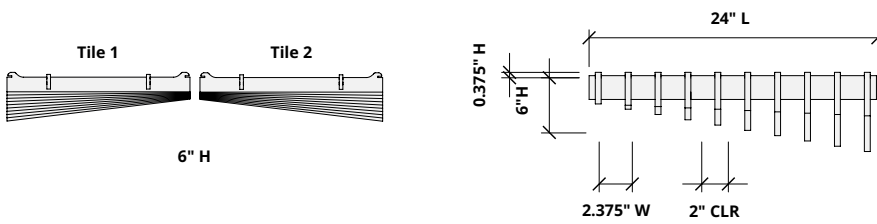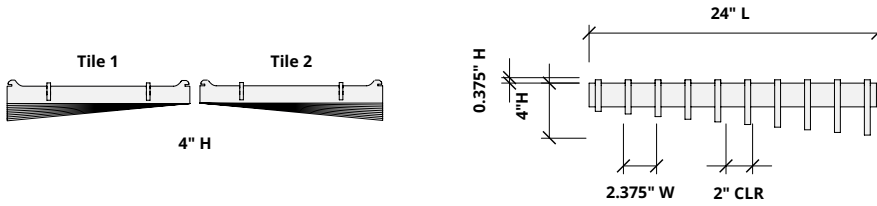


1. Choose Slat Height

2. Choose Tile Size

3. Choose Colorway

Ties are available in two sizes for use with 4" H and 6" H slats.

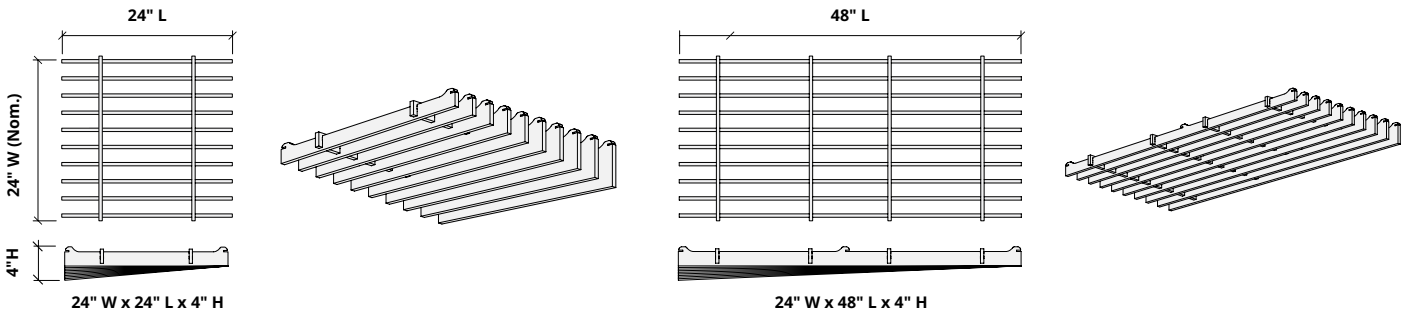

1. Choose Slat Height


2. Choose Tile Size

3. Choose Colorway

Select one colorway for your tile. See colorway choices on page 3.

Acoustic Performance

| | |
|------------------------|-------------------------|
| Test Method | ASTM E795 |
| Install Method | E-400 |
| Rating Method | ASTM C423-17 |
| Mounting Method | |
| Test Results | Pending product testing |

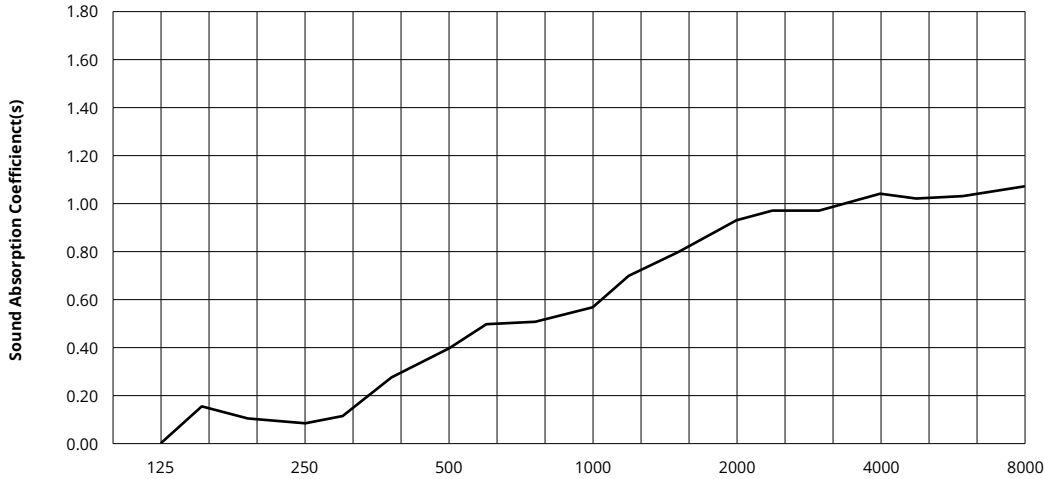


| Frequency f (Hz) | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 | NRC |
|------------------|-------------------------|-----|-----|------|------|------|------|-----|
| 12mm | Pending product testing | | | | | | | |

What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.

 For questions or additional product information, visit acoufelt.com or call **800.966.8557**.

Rail, Lines Ceiling Frames | February 2026