

Recess, Chamfer Ceiling Frames

Premier Collection

Chamfer ceiling frames boast a sleek angled edge and a lightweight design, making them easy to install in any space. With a variety of sizes and a wide selection of Premier Collection colors, they offer exceptional design versatility. Elevate any environment with enhanced texture, superior sound management, and striking visual appeal.

Specifications

Surface	Ceiling		
Material	FilaSorb™ polyester felt		
Weight	0.49 lb./ft ² (±10%)		
Standard Sizes	Thickness	Height	Width x Length
	1" T	4, 6, 8" H	24" W x 24" L 48" W x 48" L
Compatible T-grid	Type	Layout	
	9/16" Flat	Standard 24" x 24"	
	15/16" Flat	Standard 48" x 48"	



Recess, Chamfer Ceiling Frame in Pearl

Technical

NRC Rating	Pending product testing
Fire Test	ASTM E84, Class A Flame spread index: 15 Smoke developed index: 200
Water Sorption	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
Colorfastness	ISO 105-B02, 6-7

Details

Lead Time	3 – 6 weeks
Origin	Manufactured and assembled in the US
Warranty	Product: 20 years* Colorfastness: 20 years*

* Conditions apply

Environmental

Recycled Content	Minimum 60%
Energy	Generated using 40% solar energy
Indoor Air Quality	VOC less than/equal to 0.5mg/m3
Recyclable	100%*
Certifications	Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

* PET is recyclable through participating partners




For questions or additional product information, visit acoufelt.com or call 800.966.8557.

Recess, Chamfer Ceiling Frames | January 2026



Order samples at acoufelt.com/colorways


 For questions or additional product information, visit acoufelt.com or call 800.966.8557.

Recess, Chamfer Ceiling Frames | January 2026

Sizes


Standard Sizes	Thickness	Height	Width x Length	Compatible T-grid	Type	Layout
	1" T	4, 6, 8" H	24" W x 24" L 48" W x 48" L		9/16" Flat 15/16" Flat	Standard 24" x 24" Standard 48" x 48"

Plan

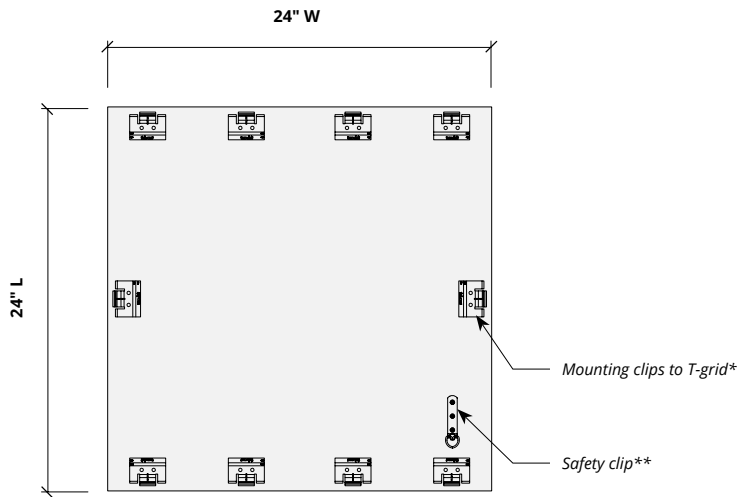


*Clip spacing may differ. Product ships assembled.
 **Safety cable comes standard on all Recess product lines. See installation guides for additional details.

Elevations

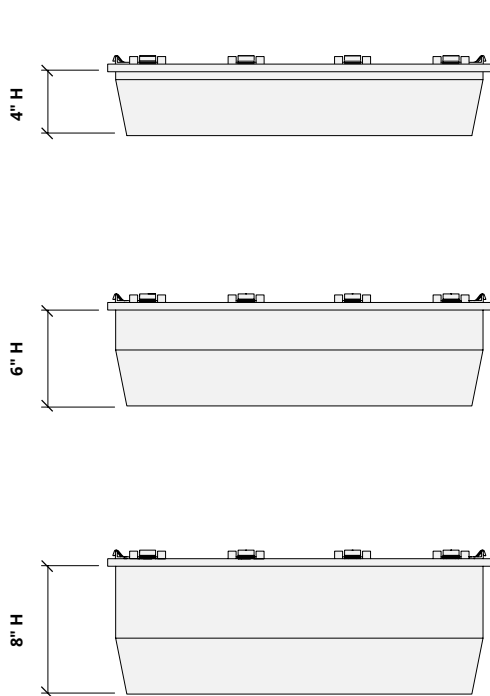


Perspectives

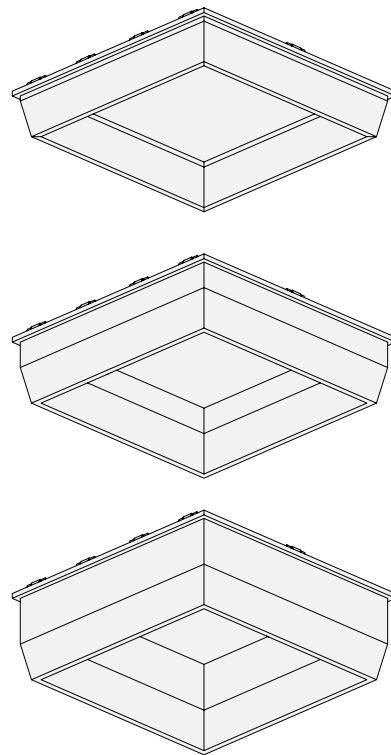

Sizes (cont.)


Plan

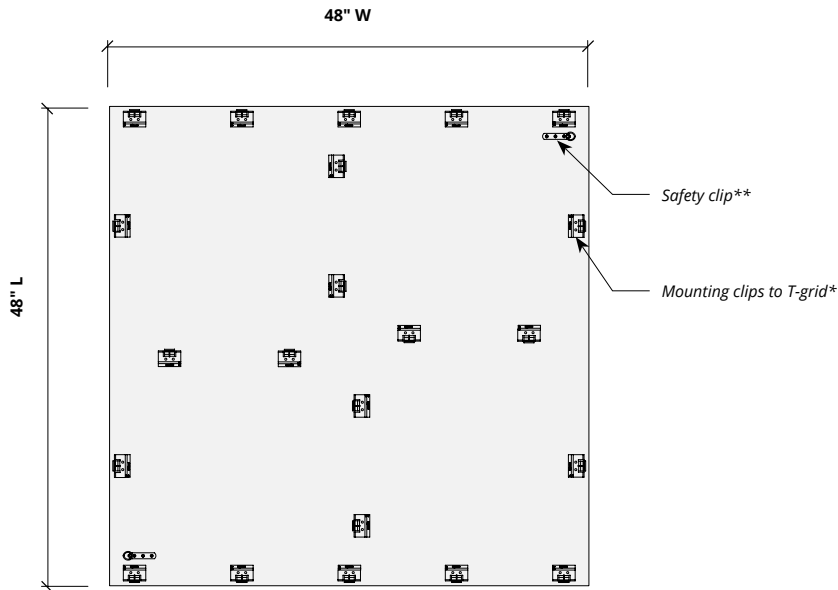


*Clip spacing may differ. Product ships assembled.

**Safety cable comes standard on all Recess product lines. See installation guides for additional details.

Elevations

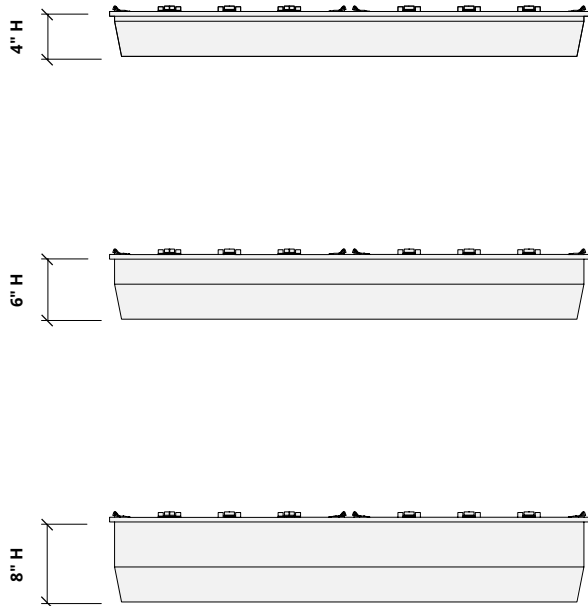

Perspectives

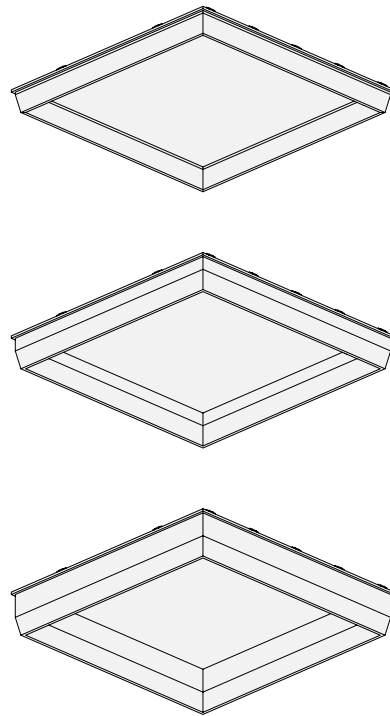

How to Specify

1. Choose Sizes


2. Choose Colorways

Select desired height and grid size.

1. Choose Sizes

2. Choose Colorway


Select one colorway for your slats and one colorway for your backer panel, or one colorway for both. See page 3 for colorways.

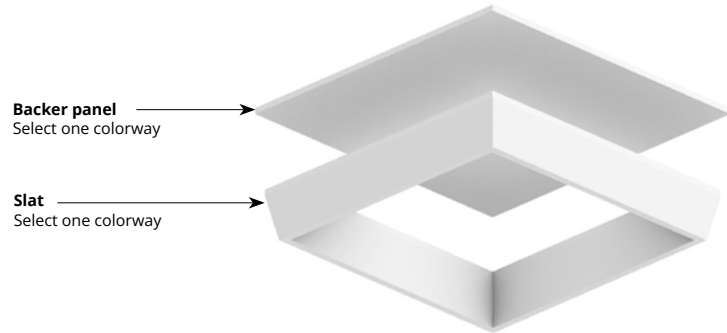


Product ships assembled.

Lighting Coordination


24" x 24", 24" x 48" Grid light

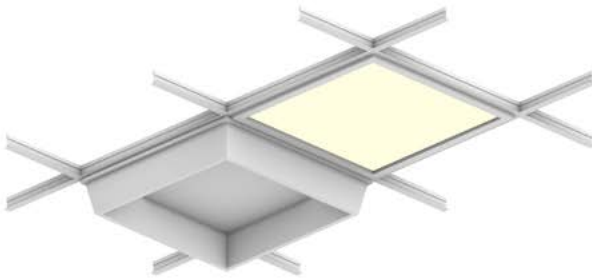


Drop pendant light

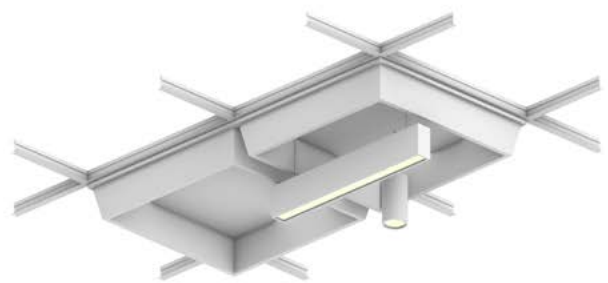

Recessed light

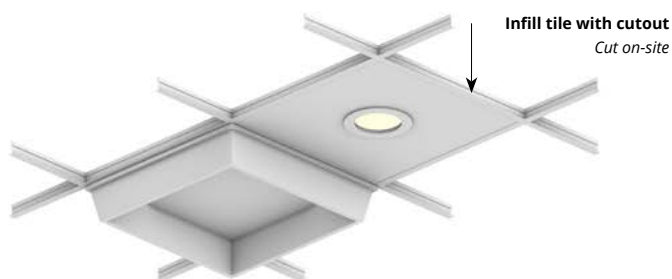

Grid mounted light (track, pendant)

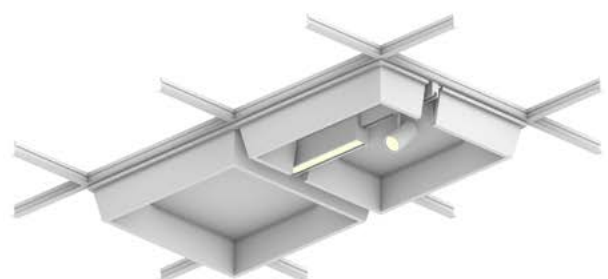


visit acoufelt.com or call 800.966.8557.

Recess, Channel Ceiling Frames | January 2026

Acoustic Performance

Test Method	ASTM E795-16
Install Method	A
Rating Method	ISO 11654-1997
Test Results	Product testing in progress

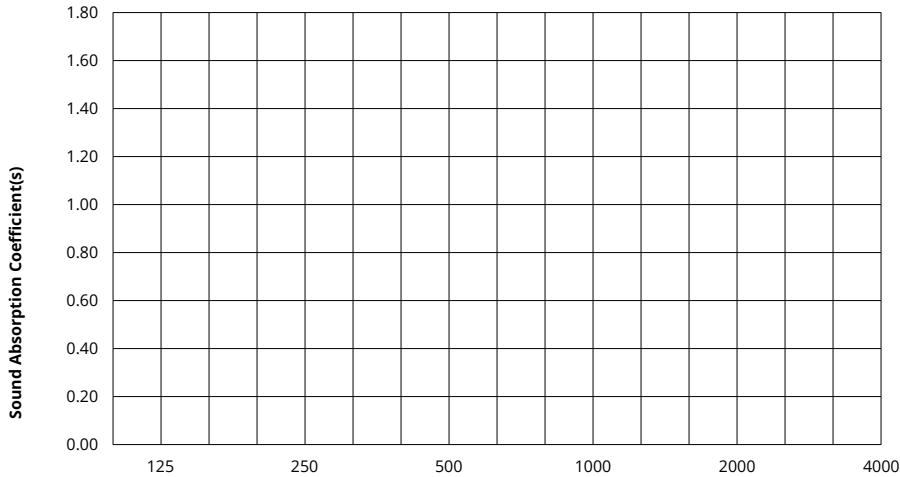


	Frequency f (Hz)	125	250	500	1000	2000	4000	NRC

What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.

 For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call **800.966.8557**.

Recess, Chamfer Ceiling Frames | January 2026