

Recess, Fillet Ceiling Frames

Premier Collection

Fillet ceiling frames feature a gently rounded edge for a smooth, refined look. Their lightweight design ensures effortless installation in any space. Available in a range of sizes and an extensive selection of Premier Collection colors, they provide exceptional design flexibility. Enhance any environment with added texture, superior sound management, and elegant visual appeal.

Specifications

Surface	Ceiling		
Material	FilaSorb™ polyester felt		
Thickness	1/2", 12mm (±10%)		
Weight	0.49 lb./ft ² (±10%)		
Standard Sizes	Thickness	Height	Width x Length
	1" T	4, 6, 8" H	24" W x 24" L 48" W x 48" L
Compatible T-grid	Type	Layout	
	9/16" Flat	Standard 24" x 24"	
	15/16" Flat	Standard 48" x 48"	



Recess, Fillet Ceiling Frame in Stonewash

Technical

NRC Rating	Pending product testing
Fire Test	ASTM E84, Class A
	Flame spread index: 15
	Smoke developed index: 200
Water Sorption	ASTM C1104-2019 (A Modified)
	Water sorbed by weight: 0.20% (based on a 12mm thick panel)
Colorfastness	ISO 105-B02, 6-7

Details

Lead Time	3 – 6 weeks
Origin	Manufactured and assembled in the US
Warranty	Product: 20 years*
	Colorfastness: 20 years*

* Conditions apply

Environmental

Recycled Content	Minimum 60%
Energy	Generated using 40% solar energy
Indoor Air Quality	VOC less than/equal to 0.5mg/m3
Recyclable	100%*
Certifications	Declare Certification - LBC Red List Free (third-party verified)
	SCS Global Indoor Advantage Gold

* PET is recyclable through participating partners



For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call 800.966.8557.


Recess, Fillet Ceiling Frames | January 2026

Colorways

PREMIER

							
White WH12	Milkyway MI74	Ivory IV11	Pearl PE21	Valentine VA70	Quartz QU67	Stonewash ST72	Sea Salt SE57
							
Platinum PL04	Almond AL55	Pistachio PI25	Turmeric TU60	Flamingo FL61	Amethyst AM69	Periwinkle PE23	Peacock PE20
							
Metal ME03	Mushroom MU75	Celery CE65	Wheat WH68	Peach PE19	Lilac LI13	Marine MA15	Sencha SE58
							
Grey GR02	Umber UM54	Wasabi WA29	Popcorn PO26	Currant CU59	Berry BE06	Azure AZ05	Oregano OR18
							
Charcoal CH01	Walnut WA56	Eucalyptus EU71	Carrot CA08	Loganberry LO77	Granite GR62	Denim DE09	Kale KA12
							
Piano Black PI24	Slate SL27	Nori NO76	Peppercorn PE22	Shiraz SH63	Flint FL64	Midnight MI16	

Order samples at acoufelt.com/colorways

 For questions or additional product information, visit acoufelt.com or call 800.966.8557.

Recess, Fillet Ceiling Frames | January 2026


Sizes

Standard Sizes	Thickness	Height	Width x Length
	1" T	4, 6, 8" H	24" W x 24" L 48" W x 48" L

Compatible T-grid	Type	Layout
	9/16" Flat	Standard 24" x 24"
	15/16" Flat	Standard 48" x 48"

Thickness	1/2", 12mm (±10%)
------------------	-------------------

Plans

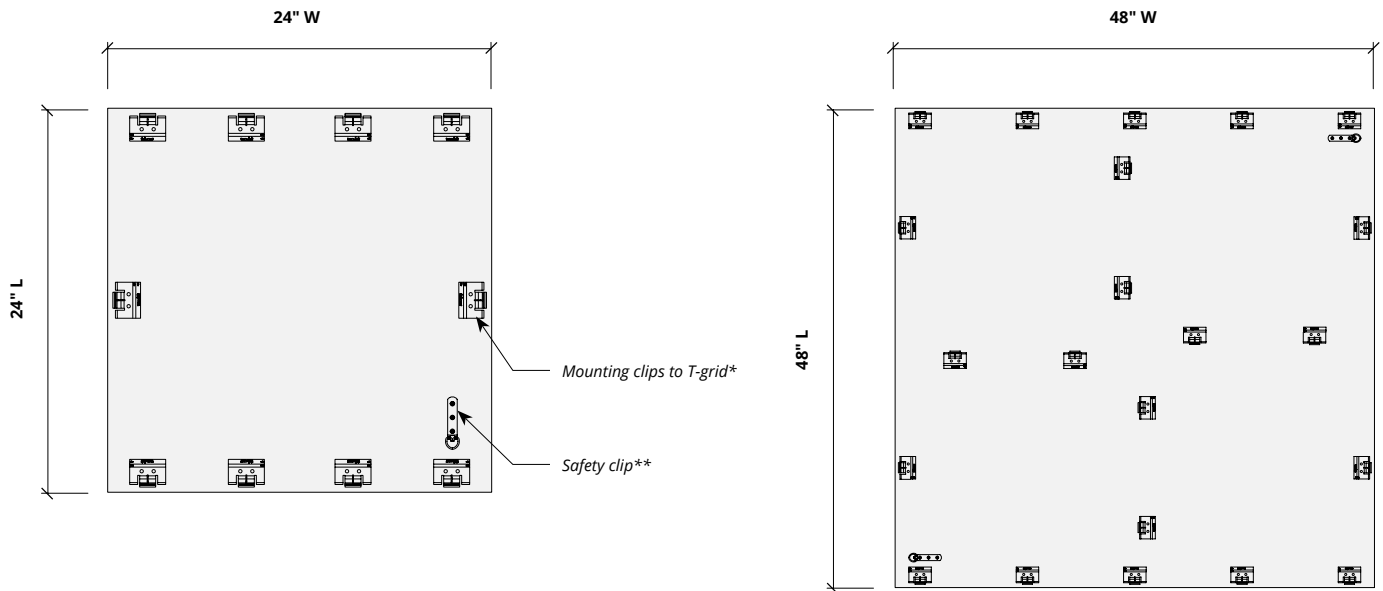

*Clip spacing may differ. Product ships assembled.
 **Safety cable comes standard on all Recess product lines. See installation guides for additional details.

Elevations



Perspectives



How to Specify

1. Choose Sizes


2. Choose Colorways

Select desired height and grid size.

1. Choose Sizes

2. Choose Colorway


Select one colorway for your slats and one colorway for your backer panel, or one colorway for both. See page 3 for colorways.

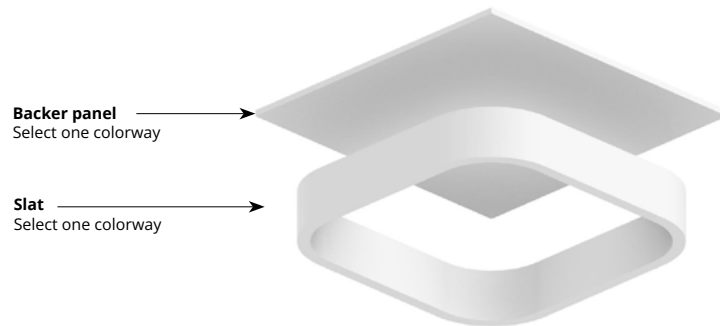


Product ships assembled.

Lighting Coordination


24" x 24", 24" x 48" Grid light

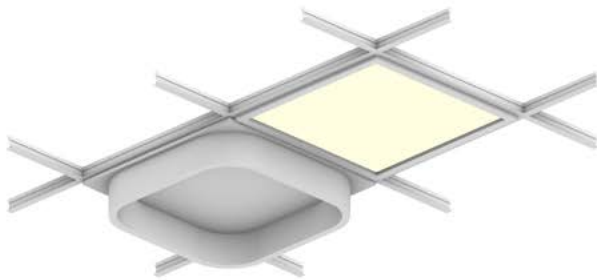


Drop pendant light

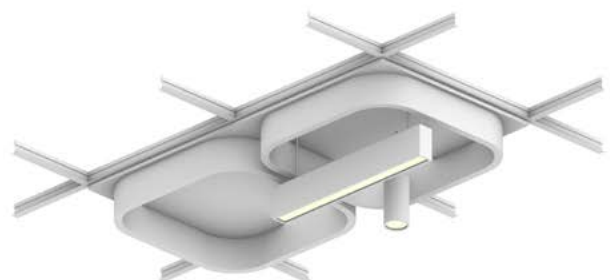

Recessed light

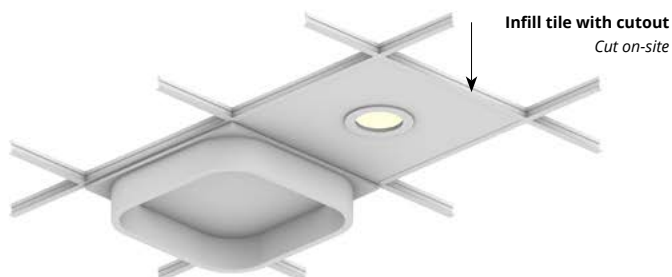

Grid mounted light (track, pendant)

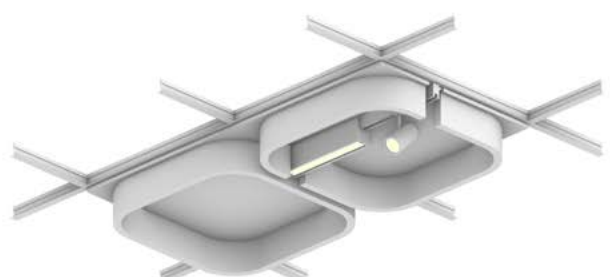


For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call 800.966.8557.

Recess, Fillet Ceiling Frames | January 2026

Acoustic Performance

Test Method	ASTM E795-16
Install Method	A
Rating Method	ISO 11654-1997
Test Results	Product testing in progress

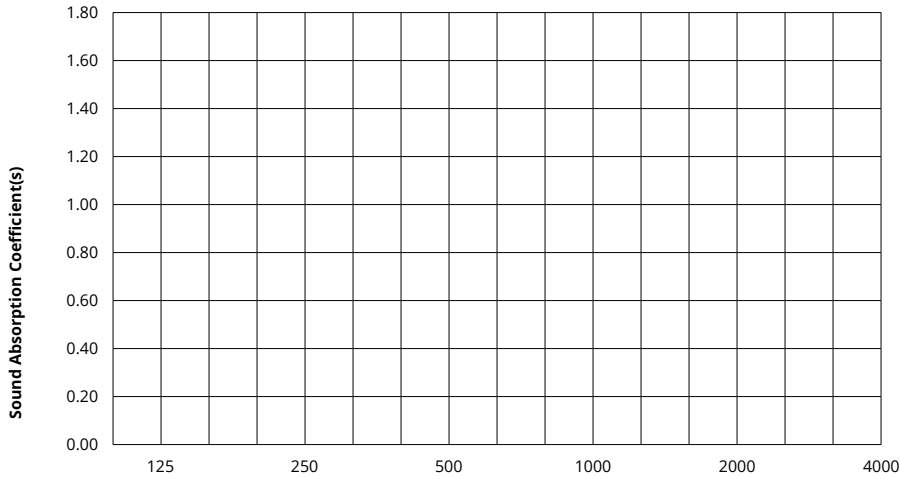


	Frequency f (Hz)	125	250	500	1000	2000	4000	NRC

What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.

 For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call **800.966.8557**.

Recess, Fillet Ceiling Frames | January 2026