


## Interlace, Network Ceiling Clouds

Premier Collection

Interlace, Network Ceiling Clouds is an installation of acoustic slats with varied dimension that creates an undulating visual effect. Designed to complement open interiors, the dynamic form of Network brings architectural depth while offering functional benefits. In addition to its striking appearance, it is engineered for enhanced sound absorption, providing the ideal solution for improving acoustics and ambiance across large spaces.

## Specifications

<b>Surface</b>	Ceiling
<b>Material</b>	FilaSorb™ polyester felt
<b>Weight</b>	0.49 lb./ft <sup>2</sup> (±10%)
<b>Standard Sizes</b>	Heights: 6" up to 12" H (2" increments) Widths: 48, 60, 72, 96, 108" W Lengths: 48, 60, 72, 96, 108" L

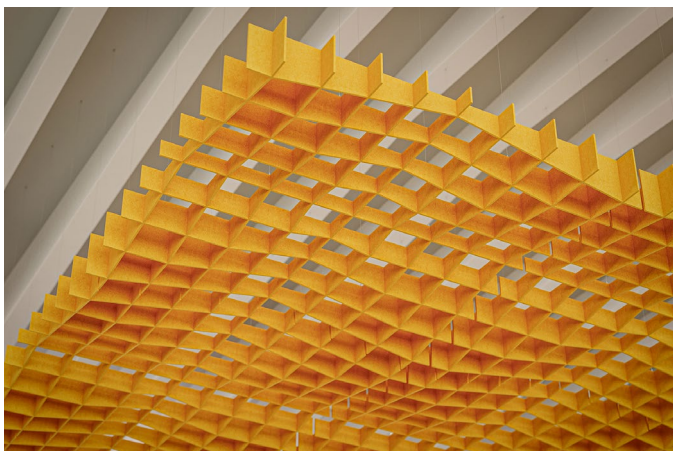

Interlace, Network Ceiling Clouds in Carrot

## Technical

<b>NRC Rating</b>	0.85, 200mm air gap* 0.80, 400mm air gap*
<b>Fire Test</b>	ASTM E84, Class A CAN/ULC-S102 Flame spread index: 15 Smoke developed index: 200
<b>Water Sorption</b>	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
<b>Colorfastness</b>	ISO 105-B02, 6-7

\* Test results available upon request.

## Details

<b>Lead Time</b>	3 - 6 weeks
<b>Origin</b>	Manufactured and assembled in the US
<b>Warranty</b>	Product: 20 years* Colorfastness: 20 years*

\* Conditions apply

## Environmental

<b>Recycled Content</b>	Minimum 60%
<b>Energy</b>	Generated using 40% solar energy
<b>Indoor Air Quality</b>	VOC less than/equal to 0.5mg/m3
<b>Recyclable</b>	100%*
<b>Certifications</b>	Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

\* PET is recyclable through participating partners.




For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call 800.966.8557.

Interlace, Network Ceiling Clouds | July 2025

# Colorways

## PREMIER



White  
WH12



Almond  
AL55



Celery  
CE65



Sencha  
SE58



Metal  
ME03



Flamingo  
FL61




Quartz  
QU67




Turmeric  
TU60



Platinum  
PL04



Pearl  
PE21



Pistachio  
PI25



Thistle  
TH28



Stonewash  
ST72




Amethyst  
AM69



Valentine  
VA70



Wheat  
WH68




Grey  
GR02



Ivory  
IV11




Eucalyptus  
EU71



Peacock  
PE20



Periwinkle  
PE23




Lilac  
LI13



Peach  
PE19



Popcorn  
PO26



Slate  
SL27



Milkyway  
MI74



Wasabi  
WA29



Sea Salt  
SE57



Marine  
MA15



Berry  
BE06




Peppercorn  
PE22




Carrot  
CA08



Charcoal  
CH01



Umber  
UM54



Oregano  
OR18




Azure  
AZ05




Granite  
GR62




Iris  
IR10




Shiraz  
SH63




Currant  
CU59




Piano Black  
PI24




Walnut  
WA56




Kale  
KA12



Denim  
DE09




Midnight  
MI16



Flint  
FL64

Order samples at [acoufelt.com/colorways](https://acoufelt.com/colorways)

 For questions or additional product information, visit [acoufelt.com](https://acoufelt.com) or call 800.966.8557.


Interlace, Network Ceiling Clouds | July 2025

# Sizes


**Standard Sizes**      Heights: 6" up to 12" H (2" increments)  
                                 Widths: 48, 60, 72, 96, 108" W  
                                 Lengths: 48, 60, 72, 96, 108" L

---



## Perspective

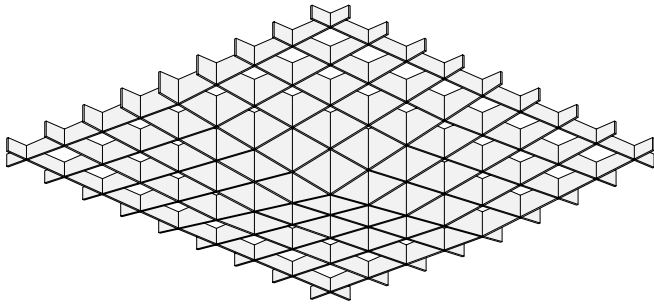

## Plan

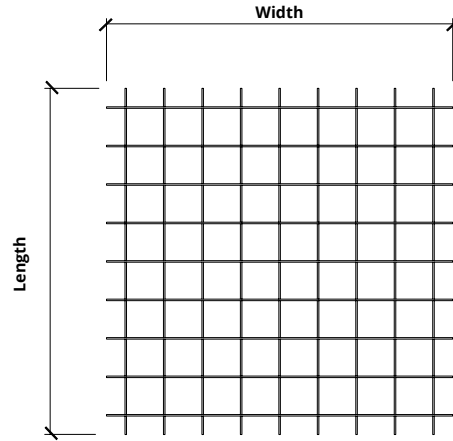


## Elevations

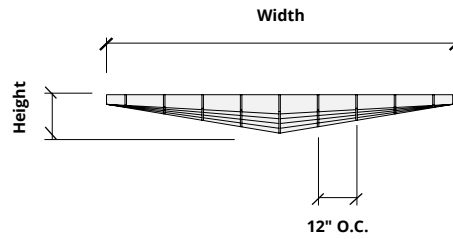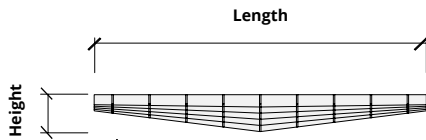


# Mounting Methods

## Cable to deck

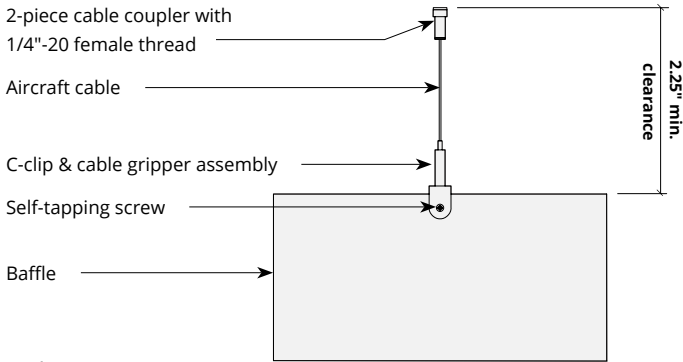


Hardware Kits:  
 HK1006 - 48" Cable  
 HK1010 - 120" Cable

## Cable to T-grid

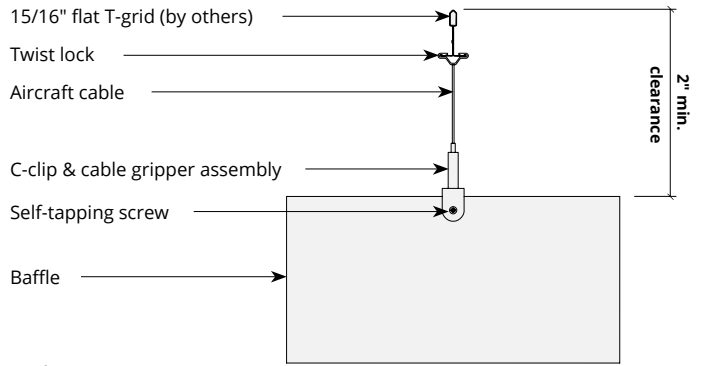


Hardware Kits:  
 HK1008 - 48" Cable  
 HK1012 - 120" Cable

## Cable to strut channel

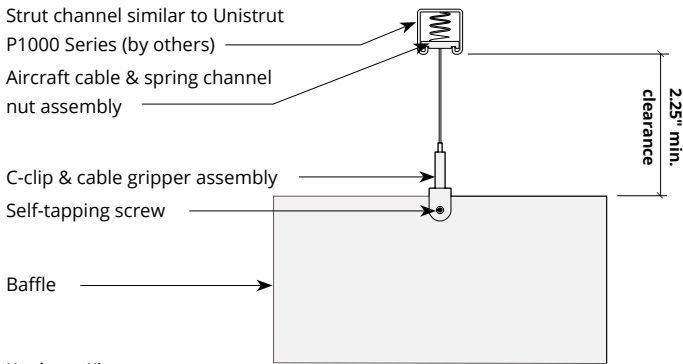

Hardware Kits:  
 HK1009 - 48" Cable  
 HK1013 - 120" Cable


## Swivel cable to deck

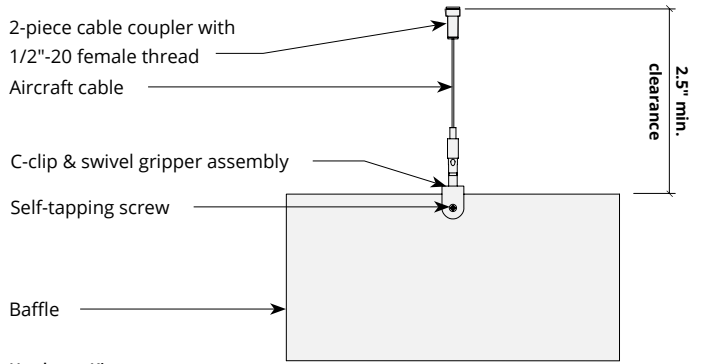

Hardware Kits:  
 HK1007 - 48" Cable  
 HK1011 - 120" Cable

# Acoustic Performance

<b>Test Method</b>	ISO 11654-2002
<b>Install Method</b>	E200, E400
<b>Rating Method</b>	ASTM C423-09a
<b>Test Results</b>	NRC 0.85, 200mm air gap SAA 0.86, 200mm air gap NRC 0.80, 400mm air gap SAA 0.83, 400mm air gap

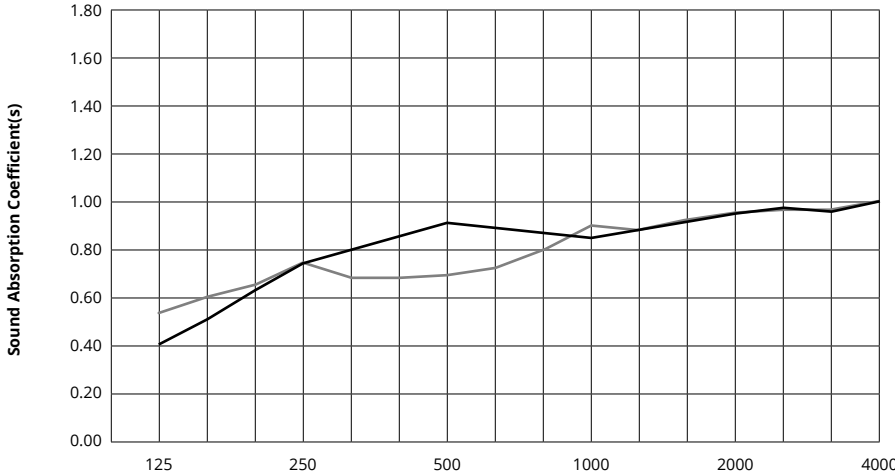


	Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
	12mm, 200mm air gap	0.40	0.75	0.90	0.85	0.95	1.00	0.85
	12mm, 400mm air gap	0.55	0.75	0.70	0.90	0.95	1.00	0.80

## What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

*Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one-third octave bands at 125, 250, 500, 1000, 2000, and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the 12 one-third octave bands ranging between 200 and 2500 Hz.*

 For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call **800.966.8557**.

Interlace, Network Ceiling Clouds | July 2025