




SoftenUp, Foothill Ceiling Frames

WoodGrain Collection

SoftenUp™ modular ceiling tiles create a warm and welcoming atmosphere in any space. Foothill is designed for effortless installation and seamlessly fits into T-grid drop-ceiling systems. Each tile is comprised of a series of 2" W linear slats. Foothill can be specified from three sizes and multiple colors allowing for more creative and personalized installations.

Specifications

| | | |
|-------------------------------|---------------------------------|---|
| Surface | Ceiling | |
| Material | FilaSorb™ polyester felt | |
| Weight | 0.49 lb./ft ² (±10%) | |
| Standard Sizes | Slat Profiles | Backer Panels |
| | 2" W x 3" H | 24" W x 24" L 24" W x 48" L 24" W x 96" L |
| <i>Custom sizes available</i> | | |
| Compatible T-grid | Type | Layout |
| | 15/16" Flat | Standard 24" x 24" |
| | 9/16" Flat | Standard 24" x 24" |

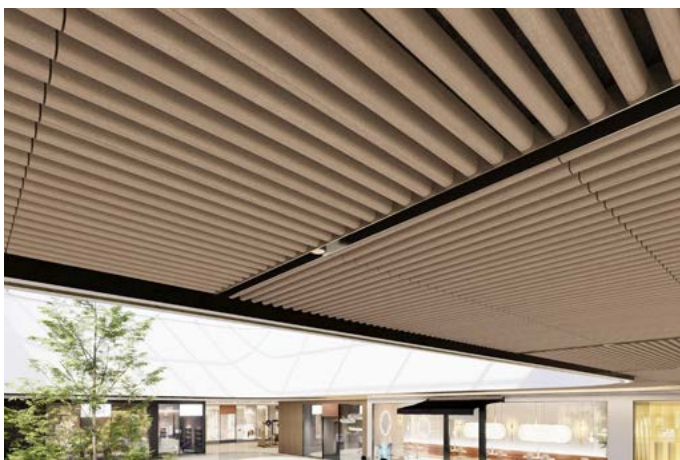

SoftenUp, Foothill Ceiling Frames in White Oak

Technical

| | |
|-----------------------|--|
| NRC Rating | 0.95* |
| Fire Test | ASTM E84, Class A CAN/ULC-S102 Flame spread index: 15 Smoke developed index: 200 |
| Water Sorption | ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel) |
| Colorfastness | ISO 105-B02, 6-7 |

* Test results available upon request

Details

| | |
|------------------|--|
| Lead Time | 3 - 6 weeks |
| Origin | Manufactured and assembled in the US |
| Warranty | Product: 20 years* Colorfastness: 20 years* |

* Conditions apply

Environmental

| | |
|---------------------------|--|
| Recycled Content | Minimum 60% |
| Energy | Generated using 40% solar energy |
| Indoor Air Quality | VOC less than/equal to 0.5mg/m ³ |
| Recyclable | 100%* |
| Certifications | Health Product Declaration (HPD)** Environmental Product Declaration Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold |

* PET is recyclable through participating partners

** HPD only applies to 12mm thickness



© The Health Product Declaration® logo is a registered trademark of HPD Collaborative.



For questions or additional product information, visit acoufelt.com or call 800.966.8557.

SoftenUp, Foothill Ceiling Frames | January 2026

Colorways

WOODGRAIN



Picket Fence
WQ01



Loft
WQ06



White Elm
WQ07



Lyed Larch
WQ30



White Oak
WQ13



Baltic Birch
WQ12



Knotty Spruce
WQ29



French Bobbin
WQ08



Boat Shed
WQ02



Nordic Plank
WQ15



Boardwalk
WQ10



Mocha Legno
WQ25



Mountain Lodge
WQ24



Wine Barrel
WQ03



Log Cabin
WQ04



Natural Oak
WQ16



Woodland Fog
WQ22



Driftwood
WQ21



Weathered Slate
WQ14



Petrified Ash
WQ23



Antique Chest
WQ11



European Larch
WQ17



Fumed Oak
WQ19



Teak
WQ18



Charred Larch
WQ09



Shadow Oak
WQ28



Barn Door
WQ05



Black Walnut
WQ20



Scorched Timber
WQ26



Espresso Oak
WQ27


Order samples at acoufelt.com/colorways

Colorways

PREMIER

| | | | | | | | |
|--|---|---|---|---|--|---|---|
|  |  |  |  |  |  |  |  |
| White WH12 | Milkyway MI74 | Ivory IV11 | Pearl PE21 | Valentine VA70 | Quartz QU67 | Stonewash ST72 | Sea Salt SE57 |
|  |  |  |  |  |  |  |  |
| Platinum PL04 | Almond AL55 | Pistachio PI25 | Turmeric TU60 | Flamingo FL61 | Amethyst AM69 | Periwinkle PE23 | Peacock PE20 |
|  |  |  |  |  |  |  |  |
| Metal ME03 | Mushroom MU75 | Celery CE65 | Wheat WH68 | Peach PE19 | Lilac LI13 | Marine MA15 | Sencha SE58 |
|  |  |  |  |  |  |  |  |
| Grey GR02 | Umber UM54 | Wasabi WA29 | Popcorn PO26 | Currant CU59 | Berry BE06 | Azure AZ05 | Oregano OR18 |
|  |  |  |  |  |  |  |  |
| Charcoal CH01 | Walnut WA56 | Eucalyptus EU71 | Carrot CA08 | Loganberry LO77 | Granite GR62 | Denim DE09 | Kale KA12 |
|  |  |  |  |  |  |  | |
| Piano Black PI24 | Slate SL27 | Nori NO76 | Peppercorn PE22 | Shiraz SH63 | Flint FL64 | Midnight MI16 | |

Order samples at acoufelt.com/colorways

 For questions or additional product information, visit acoufelt.com or call 800.966.8557.

SoftenUp, Foothill Ceiling Frames | January 2026

How to Specify


1. Choose Slat Size

2. Choose Backer Panel Size

3. Choose Colorways

4. Optional Corner Panel

Slats are available in one size:

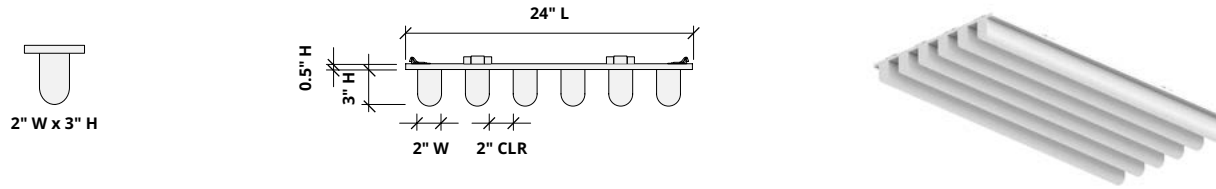


1. Choose Slat Size

2. Choose Backer Panel Size

3. Choose Colorways

4. Optional Corner Panel

Backer panels are available in three sizes.

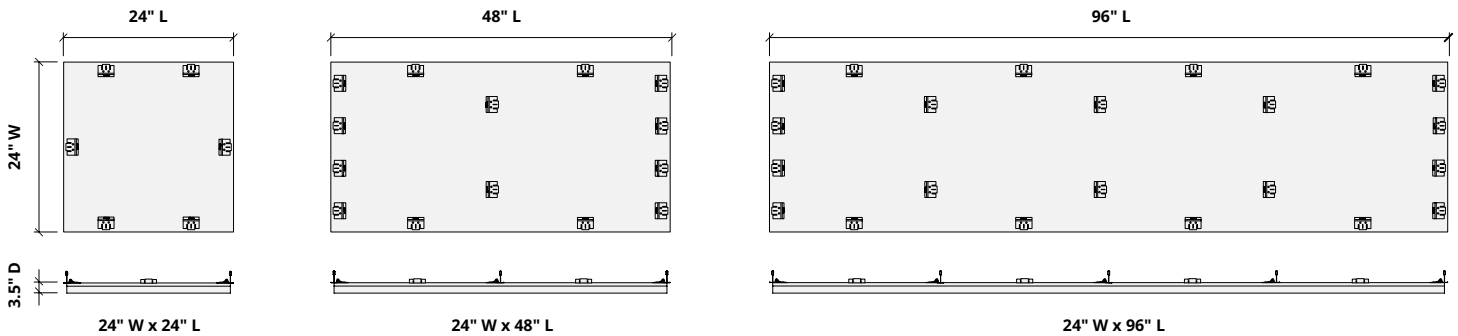

1. Choose Slat Size


2. Choose Backer Panel Size

3. Choose Colorways

4. Optional Corner Panel

Select one colorway for your slats and one colorway for your backer panel. See colorway choices on pages 3 and 4.

If you're specifying dark colored backer panels, we recommend dark drop ceiling grids (not provided).

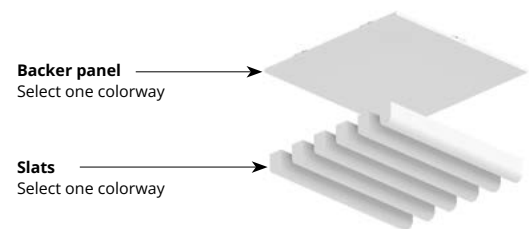

How to Specify (cont.)



1. Choose Slat Size

2. Choose Backer Panel Size

3. Choose Colorways

4. Optional Corner Panel

SoftenUp acoustical ceiling panels can be seamlessly integrated with corresponding wall panels by specifying the corresponding corner piece.

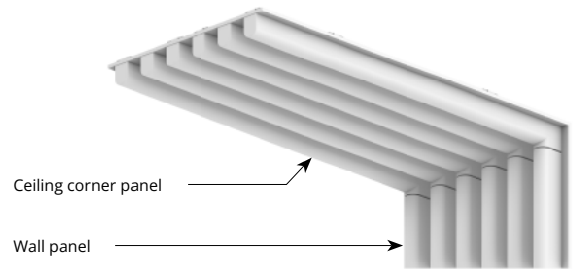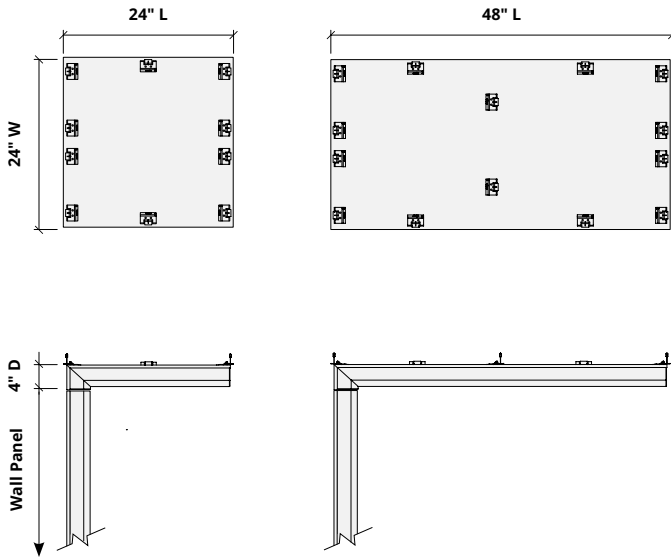

See corresponding SoftenUp, Foothills wall panel specification sheet for additional information.




For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call 800.966.8557.


SoftenUp, Foothill Ceiling Frames | January 2026

Recommended Layouts


Layout 1

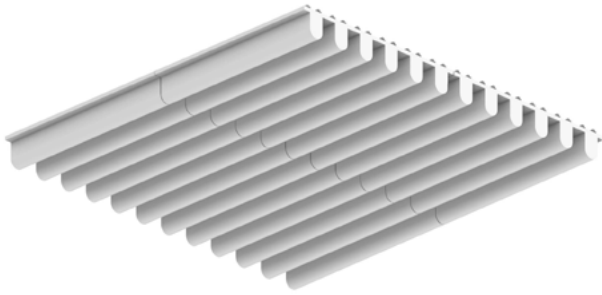


Layout 2

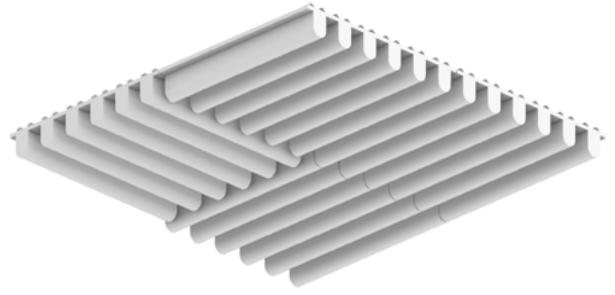

Layout 3

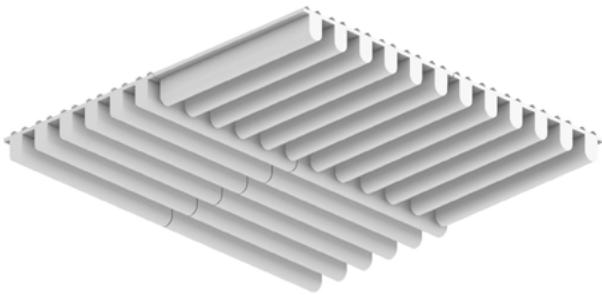


Layout 4

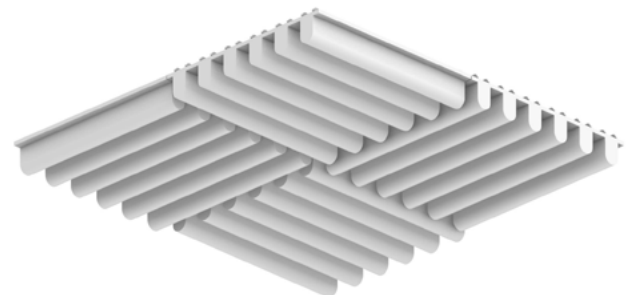


Lighting Coordination


24" x 24", 24" x 48" Grid light

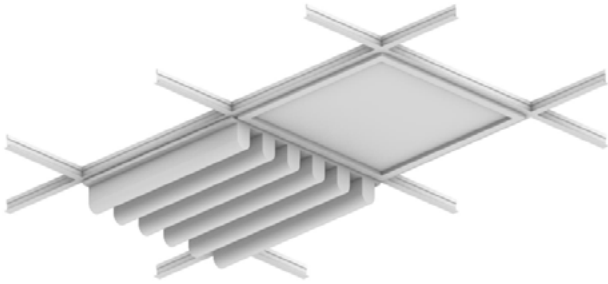


Drop pendant light

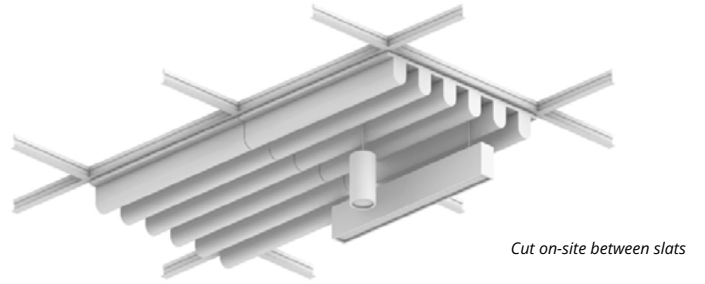

Recessed light

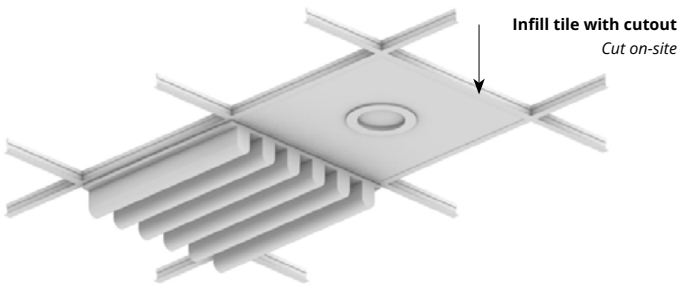


Grid mounted light (track, pendant)

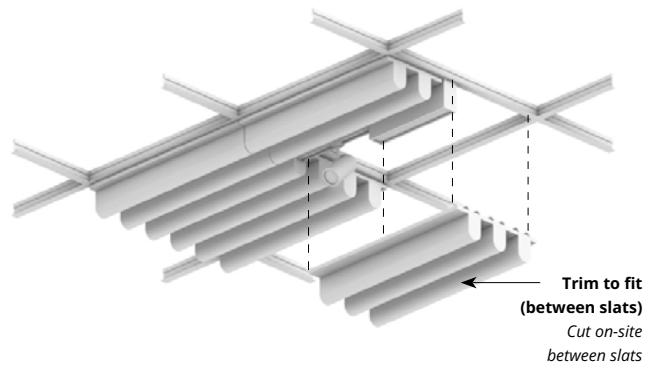

Acoustic Performance

| | |
|------------------------|--|
| Test Method | ASTM E795 |
| Install Method | Type E-400 |
| Rating Method | ASTM C423 |
| Mounting Method | 2" W x 3" H slat on 12mm backer with 400mm air gap |
| Test Results | NRC 0.95 SAA 0.96 |

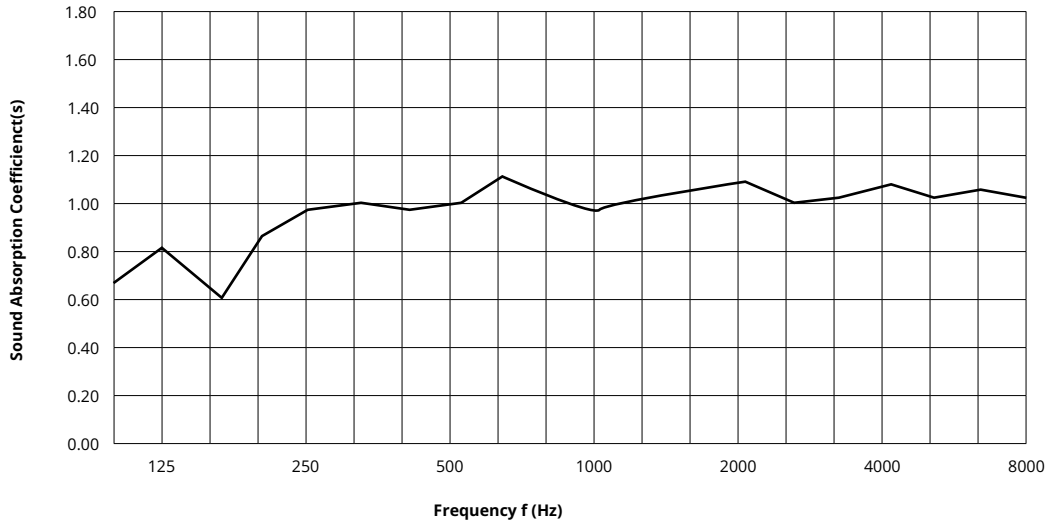


| Frequency f (Hz) | 125 | 250 | 500 | 1000 | 2000 | 4000 | NRC |
|------------------|------|------|------|------|------|------|------|
| 12mm | 0.67 | 0.86 | 0.96 | 1.02 | 1.04 | 1.00 | 0.95 |

What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.

 For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call **800.966.8557**.

SoftenUp, Foothill Ceiling Frames | January 2026

Suspension

The SoftenUp ceiling tiles are designed to connect to standard drop-ceiling grid systems via a series of tabs integrated into the design. No additional hardware is required for standard installation. Seismic zones may require additional considerations (see note on seismic).

Life Safety

The panels can be trimmed on-site, using a sharp utility knife, to accommodate any existing signage and/or wayfinding markings. Cut-outs must occur in 2" gap between slats. All fixtures must be supported independent of tiles.

** Panels cut on-site may require additional support.*

Weight

- 3"H slat weight = 2 lbs./sq. ft.
- 1"H slat weight = 1.25 lbs./sq. ft.

Clearance/Tolerance

When installed, SoftenUp tiles have a consistent 1/8" reveal to account for any on-site tolerance concerns. Panels have a method for tile alignment integrated into the design.

** A continuous slat design is available. Contact us for details.*

MEP/FP

The panels can be trimmed on-site, using a sharp utility knife, to accommodate any MEP/FP fixtures. These include, but are not limited to, drop-in lighting and diffusers, recessed lighting, linear diffusers, concealed and exposed fire sprinklers, and A/V equipment. Please consult all local and municipal codes, as well as a licensed engineer, for full compliance requirements. Cut-outs must occur in 2" gap between slats. All fixtures must be supported independent of tiles.

**Panels cut on-site may require additional support.*

Ceiling Access

Panels with an integrated folding access tab are available upon request. These folding tabs allow for the removal of individual tiles to access ceiling systems.

Seismic

SoftenUp ceiling tiles can provide seismic compliance through a mechanical direct screw attachment through the panel to the grid system, or an individual tile off to building structure. Please consult all local and municipal codes, as well as a licensed engineer, for full compliance requirements.