



## QuietForm Wall Panels

Premier Collection

The QuietForm™ panel is a thermal-molded acoustic solution that combines striking three-dimensional wall designs with transformative soundscaping functionality. Available in a wide spectrum of Premier color options, QuietForm panels can be effortlessly installed over any existing wall surface. With a variety of designs to choose from and the flexibility to rotate panels for unique patterns, QuietForm empowers creativity while enhancing both aesthetics and acoustic performance.

## Specifications

<b>Surface</b>	Wall
<b>Material</b>	FilaSorb™ polyester felt
<b>Weight</b>	0.49 lb./ft <sup>2</sup> (±10%) 0.98 lb./ft <sup>2</sup> (±10%)
<b>Standard Sizes</b>	48" W x 110" H Geometry design, 108" H



QuietForm, Celestial A Wall Panels in Almond

## Technical

<b>NRC Rating</b>	<b>12mm*</b> 0.45, no air gap 0.60, 20mm air gap 0.75, 50mm air gap <b>24mm*</b> 0.60, no air gap
<b>Fire Test</b>	ASTM E84, Class A CAN/ULC-S102 Flame spread index: 15 Smoke developed index: 200
<b>Water Sorption</b>	ASTM C1104-2019 (A Modified) Water sorbed by weight: 0.20% (based on a 12mm thick panel)
<b>Colorfastness</b>	ISO 105-B02, 6-7

\* Test results available upon request

## Details

<b>Lead Time</b>	3 – 6 weeks
<b>Origin</b>	Manufactured and assembled in the US
<b>Warranty</b>	Product: 20 years* Colorfastness: 20 years*

\* Conditions apply

## Environmental

<b>Recycled Content</b>	Minimum 60%
<b>Energy</b>	Generated using 40% solar energy
<b>Indoor Air Quality</b>	VOC less than/equal to 0.5mg/m3
<b>Recyclable</b>	100%*
<b>Certifications</b>	Health Product Declaration (HPD)** Declare Certification - LBC Red List Free (third-party verified) SCS Global Indoor Advantage Gold

\* PET is recyclable through participating partners

\*\* HPD only applies to 12mm thickness



® The Health Product Declaration® logo is a registered trademark of HPD Collaborative.



For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call **800.966.8557**.


Quietform Wall Panels | February 2026

# Colorways

## PREMIER

							
White WH12	Milkyway MI74	Ivory IV11	Pearl PE21	Valentine VA70	Quartz QU67	Stonewash ST72	Sea Salt SE57
							
Platinum PL04	Almond AL55	Pistachio PI25	Turmeric TU60	Flamingo FL61	Amethyst AM69	Periwinkle PE23	Peacock PE20
							
Metal ME03	Mushroom MU75	Celery CE65	Wheat WH68	Peach PE19	Lilac LI13	Marine MA15	Sencha SE58
							
Grey GR02	Umber UM54	Wasabi WA29	Popcorn PO26	Currant CU59	Berry BE06	Azure AZ05	Oregano OR18
							
Charcoal CH01	Walnut WA56	Eucalyptus EU71	Carrot CA08	Loganberry LO77	Granite GR62	Denim DE09	Kale KA12
							
Piano Black PI24	Slate SL27	Nori NO76	Peppercorn PE22	Shiraz SH63	Flint FL64	Midnight MI16	

Order samples at [acoufelt.com/colorways](https://acoufelt.com/colorways)

 For questions or additional product information, visit [acoufelt.com](https://acoufelt.com) or call 800.966.8557.


Quietform Wall Panels | February 2026

# Sizes


**Standard Sizes**    48" W x 110" H  
Geometry design, 108" H

---

**Plan**

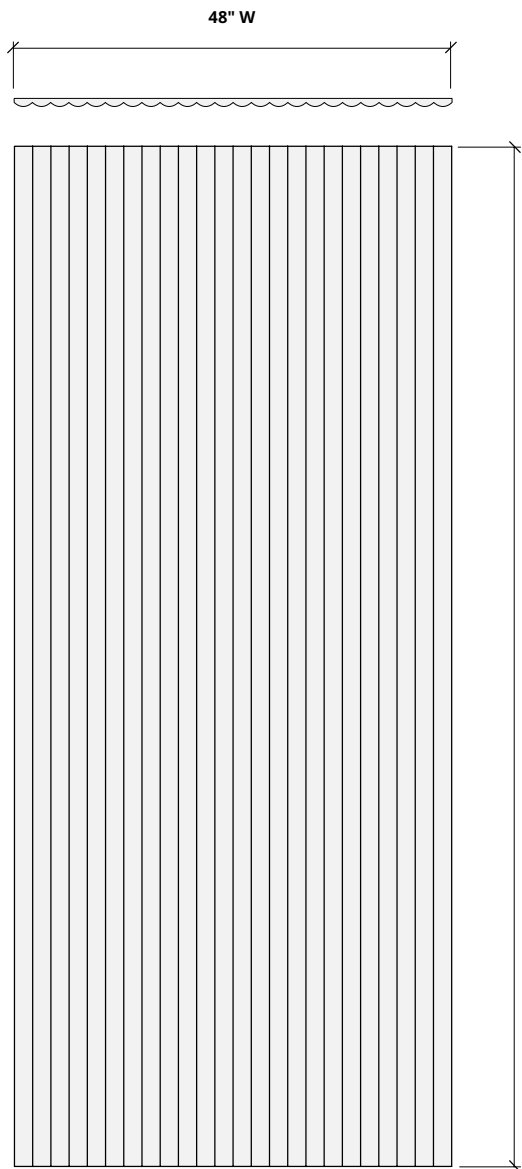

**Perspective**

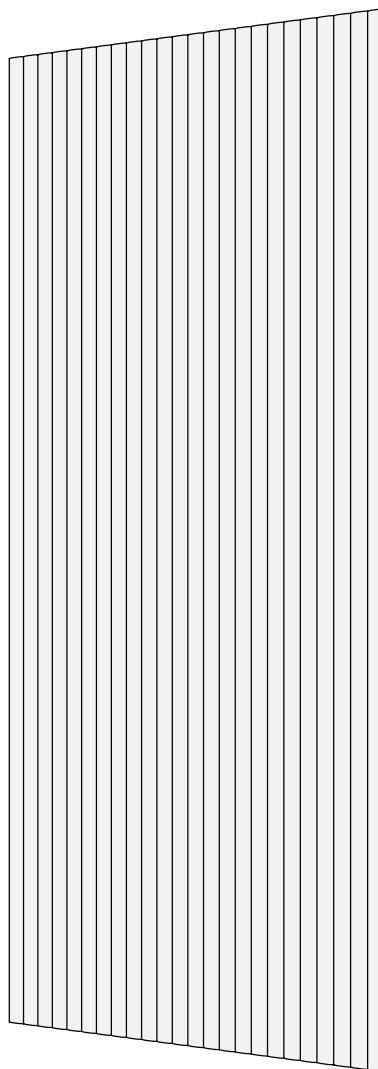


# How to Specify


## 1. Choose Panel Design

## 2. Choose Colorways


Select desired panel design.

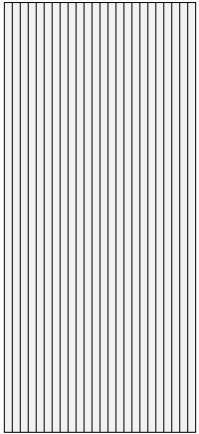


CELESTIAL A

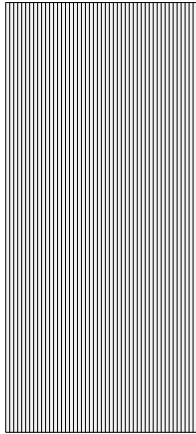


CELESTIAL B




DEWDROPS

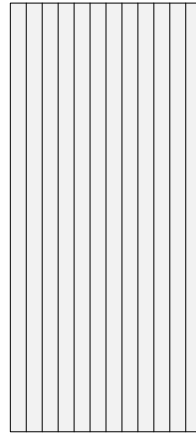


FENCE

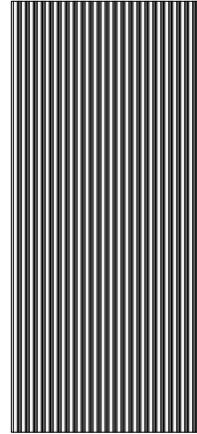


FURROWED

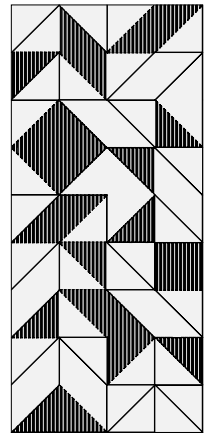


GEOMETRY

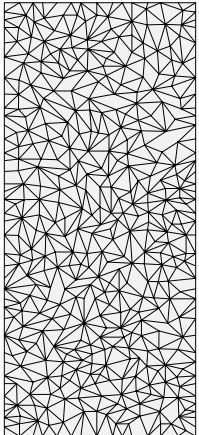


KALOS

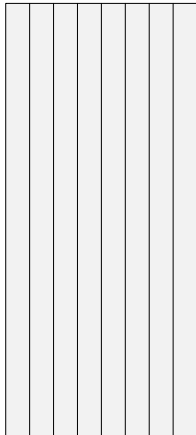


PATHWAY\*

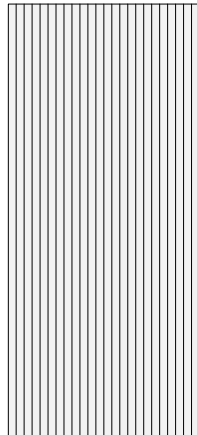


RIBBED A

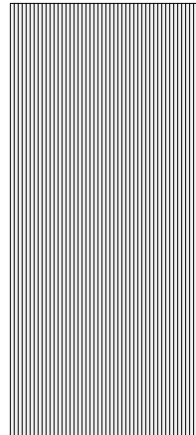

RIBBED B

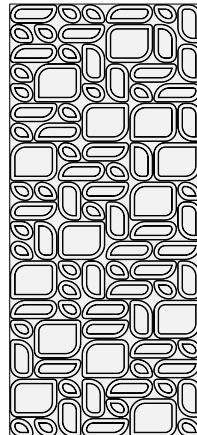

STONEWALL

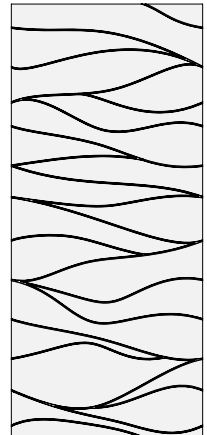


STREAM

\* See pages 6 and 7 for additional details on Pathway.

## 1. Choose Panel Design

## 2. Choose Colorways

See colorways on page 3.

 For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call 800.966.8557.

Quietform Wall Panels | February 2026

# Pathway


QuietForm™ Pathway features vertically oriented ribs that gradually fade from top to bottom, creating a subtle shift in depth that enhances visual interest while supporting acoustic performance.

**Standard Size** 48" W x 110" H


**Plan**




**Section**

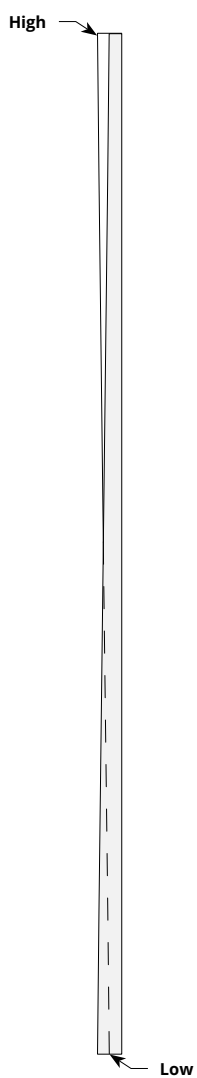

**Elevation**

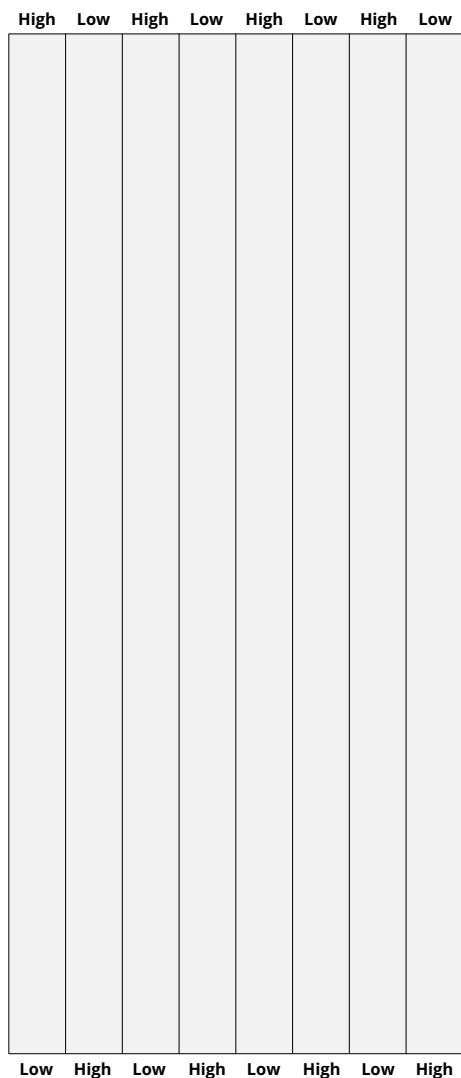

**Perspective**

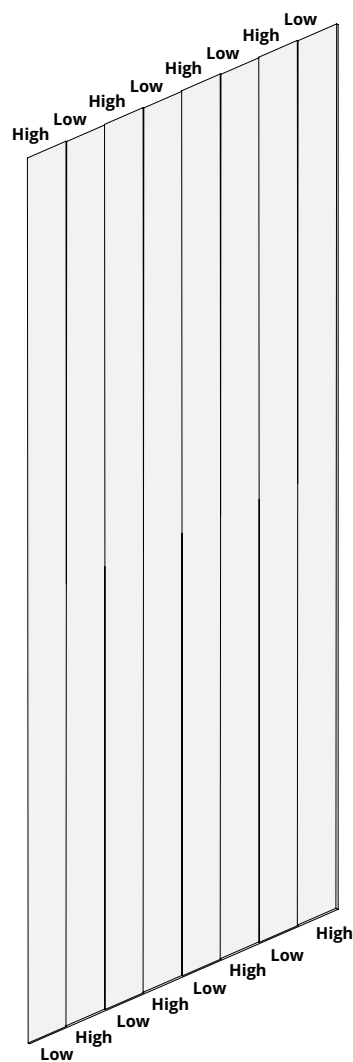


# Pathway - Recommended Layout



QuietForm, Pathway Wall Panel in Eucalyptus

## Elevation

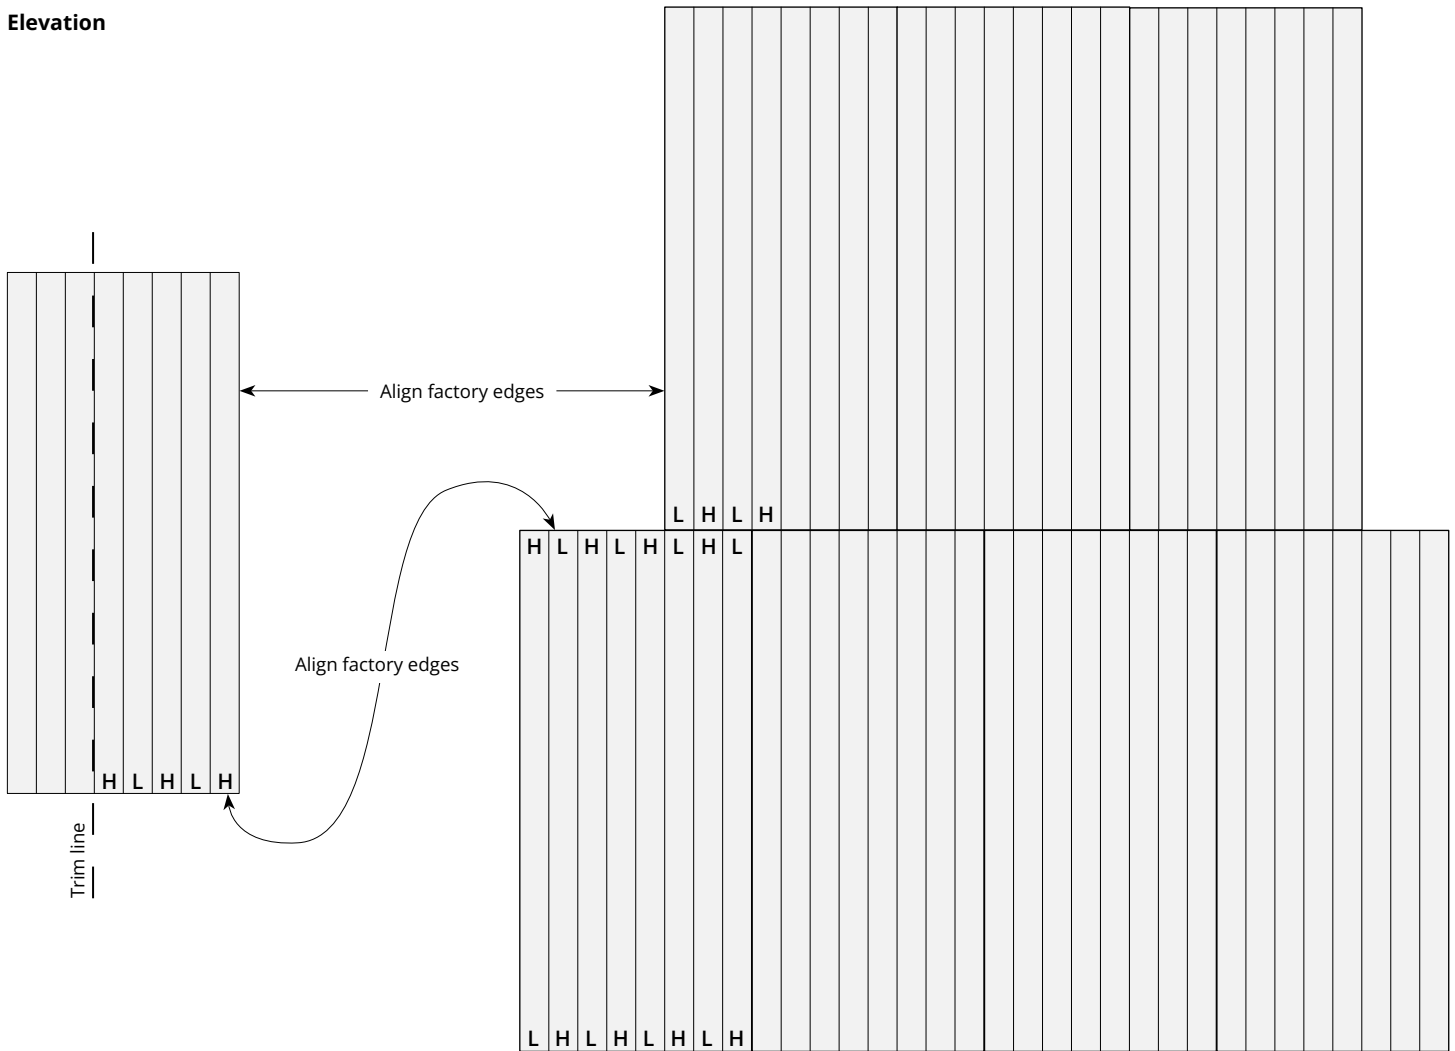

*\*Offset panels when stacking to ensure alignment of high and low ends.*




For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call 800.966.8557.

Quietform Wall Panels | February 2026

# Mounting Methods

## Construction adhesive

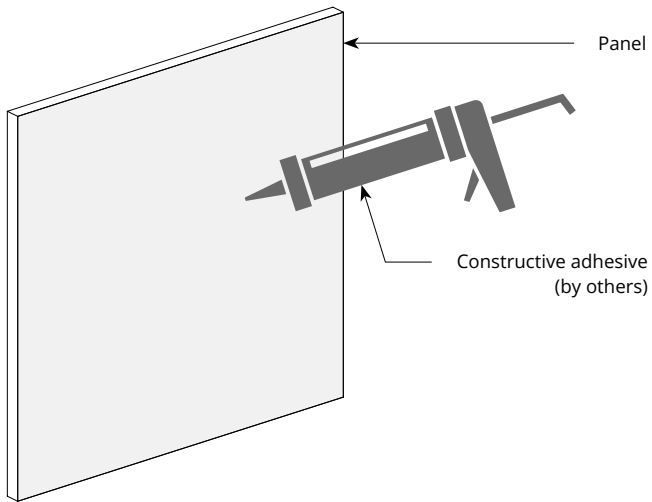

*\* For wall mount applications only.*




For questions or additional product information,  
visit [acoufelt.com](https://www.acoufelt.com) or call **800.966.8557**.

**Quietform Wall Panels** | February 2026

# Acoustic Performance

<b>Test Method</b>	ISO 354-2006
<b>Install Method</b>	A
<b>Rating Method</b>	ISO 11654-2002
<b>Test Results</b>	NRC 0.45, no air gap NRC 0.60, 20mm air gap NRC 0.75, 50mm air gap SAA 0.43, no air gap SAA 0.61, 20mm air gap SAA 0.72, 50mm air gap

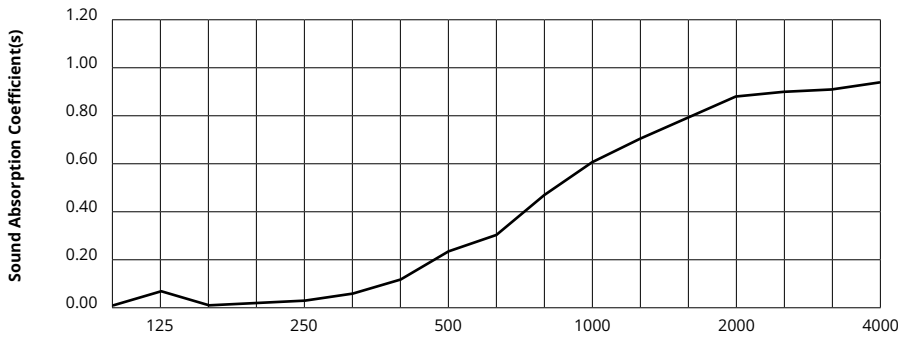


Frequency f (Hz)	125	250	500	1000	2000	4000	NRC
12mm	0.06	0.02	0.23	0.61	0.89	0.95	0.45

## What is a Noise Reduction Coefficient (NRC)?

You'll find the NRC rating in the specifications of all of our products. This acronym stands for Noise Reduction Coefficient, and is expressed as a single number, a rating that describes the degree to which acoustic products can absorb sound.

You can use NRC values to understand the overall performance of our acoustic wall and ceiling products. The higher the NRC, the better the product is at soaking up the sound.

*Performance Indices: Noise Reduction Coefficient (NRC) results represent the absorption coefficients measured at the one third octave bands at 125, 250, 500, 1000, 2000 and 4000 Hz rounded to the nearest 0.05. Acoustic testing has been performed according to the methods mentioned above. Customization of installation of the product could alter the results. Sound Absorption Average (SAA) indicates the absorption coefficient average for the twelve one-third octave bands ranging between 200 and 2500 Hz.*

 For questions or additional product information, visit [acoufelt.com](https://www.acoufelt.com) or call **800.966.8557**.

Quietform Wall Panels | February 2026